# **Product Environmental Profile**

#### Duct Temperature & Humidity Sensor 5% 0-10V/4-20mA








Reference product	Duct Temperature & Humidity Sensor 5% 0-10V/4-20mA - CP-AI-TH-SE-5500
Description of the product	This product is a humidity sensor, used for indoor humidity measurement.
Functional unit	Humidity transmitters are ideal for use in humidity measurement. Industry standard 4~20mA, 0~10VDC output signal, screw terminal, AC/DC power supply can be. It must contain:  Power Supply: 24Vac ±10%/12-30Vdc;  Temperature Range: -40~60°C;  IP65;  EMC: EN61326-1;  Safety(LVD): EN61010-1.

## Constituent materials

Reference product mass 332.6 g including the product, its packaging and additional elements and accessories

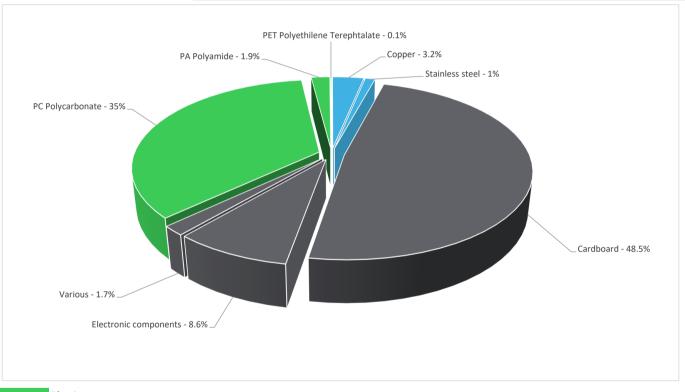

 Plastics
 37.00%

 Metals
 4.20%

 Others
 58.80%

#### **E** | Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="https://www.se.com/ww/en/work/support/green-premium/">https://www.se.com/ww/en/work/support/green-premium/</a>



### (1) Additional environmental information

End Of Life

Recyclability potential:

8%

Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0%



### **Tenvironmental impacts**

Reference service life time	10 years						
Product category	Other equipments - Active product						
Installation elements	Ref CP-Al-TH-SE-5500 does not require any installation operations, the disposal of the packaging materials are accounted for 48.89% during the installation phase (including transport to disposal).						
Use scenario	The product is in active mode 100% of the time with a power use of 0.84W, for 10 years.						
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.						
Geographical representativeness	China						
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]			
	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN			

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators			Duct Temperature & Humidity Sensor 5% 0-10V/4-20mA - CP-Al-TH-SE-5500					
lances in discourse	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
Impact indicators	Unit	lotai	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	7.01E+01	5.04E+00	9.59E-02	2.96E-01	6.42E+01	4.41E-01	-4.67E-01
Contribution to climate change-fossil	kg CO2 eq	7.01E+01	5.03E+00	9.59E-02	2.82E-01	6.42E+01	4.39E-01	-4.53E-01
Contribution to climate change-biogenic	kg CO2 eq	4.24E-02	1.79E-02	0*	1.31E-02	9.21E-03	2.20E-03	-1.44E-02
Contribution to climate change-land use and land use change	kg CO2 eq	6.04E-08	2.27E-08	0*	1.10E-09	0*	3.67E-08	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.14E-06	6.65E-07	8.46E-08	1.96E-08	3.67E-07	2.47E-09	-4.38E-08
Contribution to acidification	mol H+ eq	5.15E-01	3.26E-02	4.17E-04	1.17E-03	4.81E-01	4.50E-04	-3.91E-03
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	1.12E-04	1.83E-05	1.12E-08	2.14E-06	1.36E-05	7.81E-05	-3.86E-06
Contribution to eutrophication marine	kg N eq	5.58E-02	3.84E-03	1.91E-04	3.11E-04	5.14E-02	8.37E-05	-5.08E-04
Contribution to eutrophication, terrestrial	mol N eq	6.28E-01	3.99E-02	2.07E-03	2.35E-03	5.82E-01	1.10E-03	-4.46E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.87E-01	1.35E-02	6.80E-04	6.26E-04	1.72E-01	2.53E-04	-1.35E-03
Contribution to resource use, minerals and metals	kg Sb eq	3.37E-04	3.33E-04	0*	0*	8.24E-07	2.20E-06	-2.31E-05
Contribution to resource use, fossils	MJ	1.11E+03	6.68E+01	1.16E+00	3.08E+00	1.04E+03	1.20E+00	-4.61E+00
Contribution to water use	m3 eq	4.61E+00	1.55E+00	4.86E-03	1.26E-01	2.83E+00	9.65E-02	-3.37E-01

Additional indicators for the French regulation are available as well

Inventory flows Indicators			Duct Temperature & Humidity Sensor 5% 0-10V/4-20mA - CP-Al-TH-SE-5500					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.10E+02	0*	0*	2.21E-01	1.10E+02	5.48E-02	1.70E+00
Contribution to use of renewable primary energy resources used as raw material	MJ	3.23E+00	3.23E+00	0*	0*	0*	0*	-2.92E+00
Contribution to total use of renewable primary energy resources	MJ	1.13E+02	3.04E+00	0*	2.21E-01	1.10E+02	5.48E-02	-1.22E+00
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.11E+03	6.20E+01	1.16E+00	3.08E+00	1.04E+03	1.20E+00	-4.60E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	4.81E+00	4.81E+00	0*	0*	0*	0*	-9.40E-03
Contribution to total use of non-renewable primary energy resources	MJ	1.11E+03	6.68E+01	1.16E+00	3.08E+00	1.04E+03	1.20E+00	-4.61E+00
Contribution to use of secondary material	kg	2.40E-05	2.40E-05	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.07E-01	3.60E-02	1.13E-04	2.95E-03	6.60E-02	2.25E-03	-7.84E-03
Contribution to hazardous waste disposed	kg	7.65E+00	5.54E+00	0*	3.49E-03	1.95E+00	1.52E-01	-1.95E+00
Contribution to non hazardous waste disposed	kg	1.83E+01	6.06E+00	0*	9.61E-01	1.12E+01	1.35E-01	-4.26E+00
Contribution to radioactive waste disposed	kg	1.59E-03	9.80E-04	1.91E-05	1.29E-04	4.58E-04	5.30E-06	-2.29E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.78E-01	9.35E-04	0*	1.63E-01	0*	1.40E-02	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2306021_V1	Drafting rules	PEP-PCR-ed4-2021 09 06				
Verifier accreditation N°		Supplemented by	PSR-0005-ed2-2016 03 29				
Date of issue	6/15/2023	Information and reference documents	www.pep-ecopassport.org				
		Validity period	5 years				
Independent verification of the declaration and data, in compliance with ISO 14021: 2016							
Internal X	External						
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)							
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019							
The elements of the present PEP cannot be compared with elements from another program.							

Schneider Electric Industries SAS
Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.se.com

Published by Schneider Electric

ENVPEP2306021\_V1 ©2023 - Schneider Electric - All rights reserved

Document in compliance with ISO 14021: 2016 « Environmental labels and declarations. Type II environmental declarations »

6/15/2023