


# Product Environmental Profile

## Masterpact NT






## General information

<b>Representative product</b>	Masterpact NT - 47130
<b>Description of the product</b>	The Masterpact NT Power Circuit Breaker is designed to guarantee the protection of all low voltage electrical applications between 600 A and 1600 A. The data used to make this PEP are the most representative of the product studied. No missing data is to be declared.
<b>Functional unit</b>	Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage 1000V AC and rated current 1000A. This protection is ensured in accordance with the following parameters: - Number of poles 3 - Rated breaking capacity 88 kA at 690 V - Tripping curve long time, short time and instantaneous protections



## Constituent materials

<b>Reference product mass</b>	40900 g including the product, its packaging and additional elements and accessories
-------------------------------	--

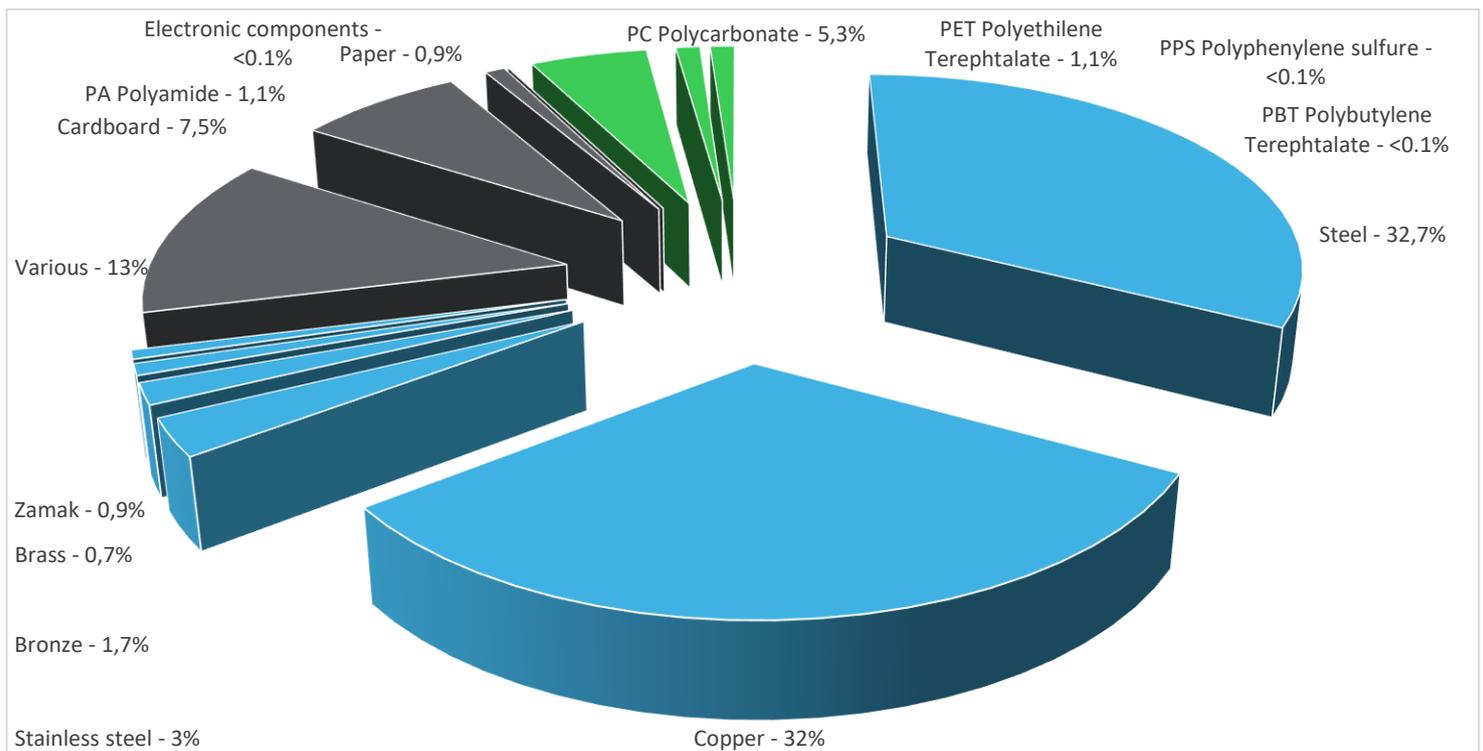

Plastics	7,5%
Metals	71,0%
Others	21,4%

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information


### The Masterpact NT presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 834,1 g, consisting of cardboard (75%), paper (25%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Ref 47130 does not require any installation operations
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains 4 PCBAs and one battery that should be separated from the stream of waste so as to optimize end-of-life treatment.  Recyclability potential: <b>71%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Circuit-breakers			
<b>Installation elements</b>	The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).			
<b>Use scenario</b>	Load rate: 50% of 1000 Amps Use time rate: 30% of reference life time			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The Masterpact NT Power Circuit Breaker is designed to guarantee the protection of all low voltage electrical applications between 600 A and 1600 A. The data used to make this PEP are the most representative of the product studied. No missing data is to be declared.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: France	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Masterpact NT - 47130					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	6,76E-03	6,70E-03	0*	0*	5,30E-05	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	8,99E+00	1,64E-01	2,56E-02	0*	8,80E+00	2,61E-03
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	3,95E-01	5,87E-02	5,89E-03	4,53E-05	3,30E-01	6,69E-04
Contribution to global warming	kg CO <sub>2</sub> eq	1,23E+03	5,86E+01	5,60E+00	0*	1,16E+03	1,10E+00
Contribution to ozone layer depletion	kg CFC11 eq	3,49E-04	6,58E-05	0*	0*	2,83E-04	5,69E-08
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	4,34E-01	1,62E-02	1,82E-03	0*	4,16E-01	2,77E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1,38E+01	1,07E+01	0*	0*	3,04E+00	0*
Total Primary Energy	MJ	2,48E+04	1,12E+03	7,92E+01	0*	2,36E+04	1,43E+01

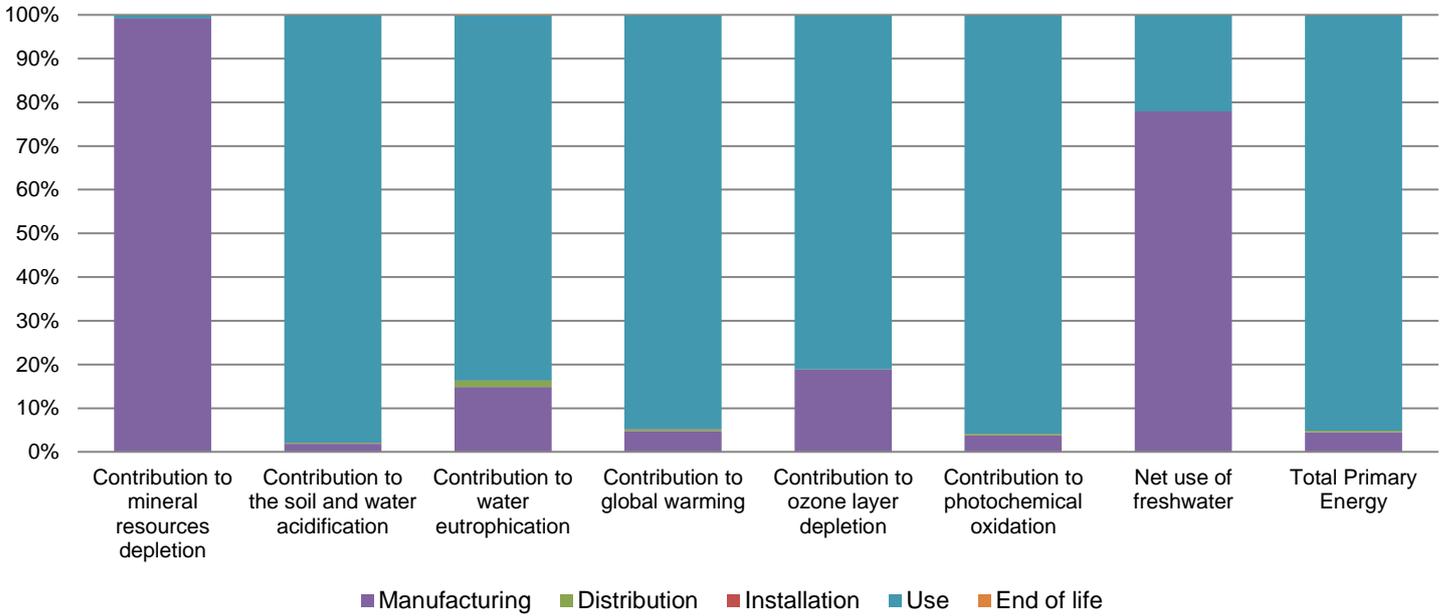

Optional indicators		Masterpact NT - 47130					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1,28E+04	7,59E+02	7,87E+01	0*	1,20E+04	1,18E+01
Contribution to air pollution	m <sup>3</sup>	7,27E+04	2,25E+04	2,38E+02	0*	4,99E+04	9,22E+01
Contribution to water pollution	m <sup>3</sup>	5,67E+04	6,87E+03	9,21E+02	6,79E+00	4,88E+04	1,05E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,83E+00	1,83E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,71E+03	2,43E+01	0*	0*	1,69E+03	0*
Total use of non-renewable primary energy resources	MJ	2,31E+04	1,10E+03	7,91E+01	0*	2,19E+04	1,43E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,71E+03	2,20E+01	0*	0*	1,69E+03	0*
Use of renewable primary energy resources used as raw material	MJ	2,28E+00	2,28E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2,30E+04	1,06E+03	7,91E+01	0*	2,19E+04	1,43E+01
Use of non renewable primary energy resources used as raw material	MJ	3,36E+01	3,36E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	5,85E+02	5,73E+02	0*	0*	0*	1,15E+01
Non hazardous waste disposed	kg	4,38E+03	2,44E+01	0*	0*	4,35E+03	0*
Radioactive waste disposed	kg	3,57E+00	1,80E-02	0*	0*	3,55E+00	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	8,04E+00	9,53E-01	0*	8,23E-01	0*	6,27E+00
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	9,07E-02	0*	0*	0*	0*	9,07E-02
Exported Energy	MJ	2,62E-03	2,46E-04	0*	2,37E-03	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2018-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number :</i>	SCHN-2011-007-V0-EN	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Verifier accreditation N°</i>	VH25	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Date of issue</i>	01/2020	<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		<i>Validity period</i>	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
Internal	External	X	
<i>The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)</i>			
<i>PEP are compliant with XP C08-100-1 :2016</i>			
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			
			

Schneider Electric Industries SAS  
ROSELYNE THAI  
[roselyne.thai@schneider-electric.com](mailto:roselyne.thai@schneider-electric.com)

35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-2011-007-V0-EN

© 2019 - Schneider Electric – All rights reserved

01/2020