


PRODUCT-DETAILS

# TM40/12

## TM40/12 Fail safe bell transformer

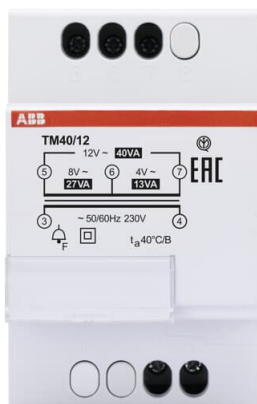

### Informations générales

Extension du type de produit	TM40/12
Code de produit	2CSM228775R0802
EAN	8012542287759
Description courte	TM40/12 Fail safe bell transformer
Description longue	These transformers, with safety extremely-low voltage secondary (SELV), are suitable for driving loads that call for a discontinuous supply.

### Technique

Normes et standards	IEC/EN 61558-2-8
Application	Residential
Tension principale	230 V
Secondary Voltage	(6-7) 4 V AC (5-6) 8 V AC (5-7) 12 V AC
Courant secondaire	3.33 A
Output Current Maximum ( $I_{out}$ )	10 A
Fréquence assignée (f)	50/60 Hz
Power Loss	3 W
Alimentation	40 V·A
Rated Output Power	40 W

Classe d'isolation	B
Couple de serrage	0.5 N·m
Transformer Type	Fail - Safe Bell Transformers
Options Provided	None
Remarques	Suitable for loads that require a discontinuous supply. Double insulation between primary and secondary windings
Connecting Capacity	2.5 mm <sup>2</sup>
Wire Stripping Length	9 mm

## Environnement

Température de l'air ambiant	Operation +10 ... +40 °C
Indice de protection	IP20
Statut RoHS	Following EU Directive 2002/95/EC August 18, 2005 and amendment
Informations RoHS	2CSC446004K0201
REACH Declaration	9AKK108467A9482
Conflict Minerals Reporting Template (CMRT)	9AKK108468A3363

## Technique UL/CSA

Connecting Capacity UL/CSA	14 AWG
----------------------------	--------

## Dimensions

Width in Number of Modular Spacings	3
Produit Largeur Net	52.5 mm
Produit Hauteur Net	0.085 m
Produit Longueur Net	0.065 m
Poids net	0.450 kg

## Commande

Emballage Niveau 1 Unités	box 4 pièce
Emballage Niveau 1 Poids	1.8 kg

## Certificats et Déclarations (Numéro de document)

Agence de certification	IMQ
Déclaration de Conformité - CE	2CSC446004K0201
EAC Certificate	9AKK107992A6660
IMQ Certificate	9AKK107992A6759

## Installation

Instructions et manuels	No document needed
-------------------------	--------------------

Wiring Diagram

9AKK108467A7357

### Downloads Préférés

Fiche produit, informations techniques

9AKK107991A8329

### Classifications

ETIM 8	EC001547 - Bell transformer
ETIM 9	EC001547 - Bell transformer
Catégorie DEEE	5. Small Equipment (No External Dimension More Than 50 cm)
WEEE B2C / B2B	Business To Consumer
CN8	85043121
eClass	V11.0 : 27031190
Code de classification d'objet	T

### Catégories

Produits basse tension → Appareillage modulaire et parafoudres → Command and Signalling Devices → Bells and safety transformers

