

TRUNGSRAM™

Innovation is our heritage
EST. 1896

A++
energy class

100
lumens/watt

T5 Batten ECO


LBTE 12 NW 3ft ECO

93044479



Product information

The LED T5 Batten designed to be a direct replacement for conventional battens, with energy savings. It offers multiple installation methods to ease your worries and bring the customer a brand new experience of soft lighting. Switch free luminaires. The best choice for smooth linear lighting. We offer this range of 8 luminaires in 4 wattages.

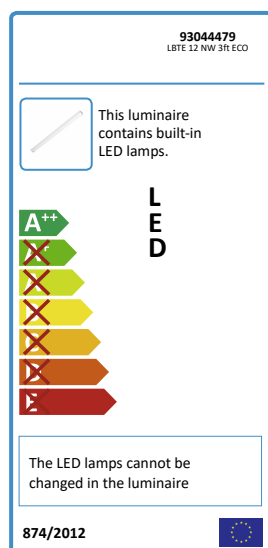

Product data

Mounting type	Surface mount
Brand	GE Lighting
IP Rating	20
Certifications	CE/EAC
Body colour	White
Weight [kg]	0.16
DIALux description	GE - T5 Batten ECO - 1200lm - 12W - 4000K - 80CRI - 93044479[SKU] - Surface mount
IEC protection classes	Class II
Impact resistance (IK)	IK02
Dimensions	881.5x25.9x37.3mm
Energy efficiency class (EEC)	A++

Performance data

Rated life L70/B50 [h]	30000
Operating Voltage	220-240V
Ambient Temperature [°C]	-20°C to +40°C
Rated efficacy [lm/W]	100
Total system power	12
Nominal lumens [lm]	1200
Rated lumens [lm]	1200
Rated power [W]	12
Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	80+

Optical data

Nominal beam angle [°]	170°
------------------------	------


Electrical data

Nominal lamp power factor	0.9
Controllability	Not dimmable electronic (Static)

Logistic data

Product status	Available
Shipment	Standard

Photometric Data

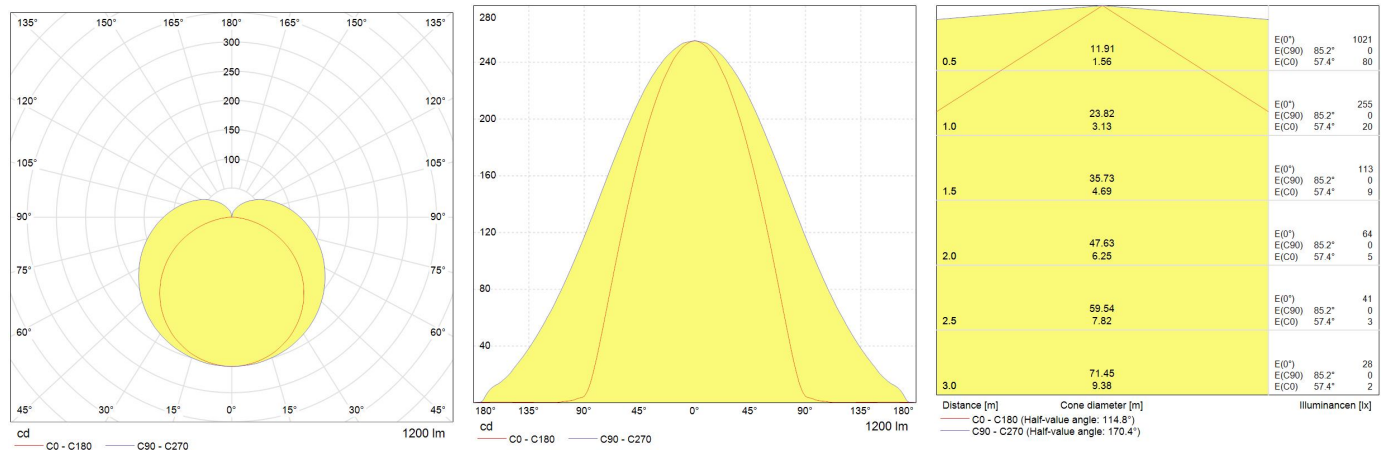

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Datasheet - GE \(PDF\)](#)

[Installation guide \(PDF\)](#)

[Images \(HTTP\)](#)

[DoC Document \(PDF\)](#)