TUNGSRAM

Innovation is our heritage EST. 1896





Tulox XO Tubular Clear LU70/90/XO/T/E27 TU 93102235

Product information

Tulox XO High Pressure Sodium lamps offer outstanding luminous efficacy, lumen maintenance and long life, thus reducing energy and maintenance costs.

Application areas



 $(\bigcap \mathbb{N})$ Road and tunnel



Street and pedestrian



(**መ**ኸ) Commercial areas



Tulox XO Tubular Clear LU70/90/XO/T/E27 TU 93102235

Product data

Product Code	93102235
Light Center Length [mm]	97
Bulb Shape	Tubular
Bulb Finish	Clear
Maximum Overall Length [mm]	156
Net weight per piece [g]	60
Gross weight per piece [g]	80
Operating position	U - Universal
Mercury Content [mg]	10
Brand	Tungsram
Cap/Base	E27

Performance data

Rated Lumens [lm]	6620
Weighted energy consumption [kWh/1000h]	80.43
Nominal efficacy [LpW]	94
Rated efficacy [LpW]	91
Energy efficiency class (EEC)	G
Nominal chromaticity coordinate X	0.53
Nominal chromaticity coordinate Y	0.43
Nominal correlated colour temperature (CCT) [K]]	2100
Nominal lumens [lm]	6600
Colour Rendering Index (CRI) [Ra]	25



Tulox XO Tubular Clear LU70/90/XO/T/E27 TU 93102235


Electrical data

Rated power [W]	73.1
Lamp Current [A]	1
Design Ambient Temperature [°C]	25
Run-up time (sec)	300
Hot restart time (sec)	240
Dimming Capability	Yes
Ballast Required	Yes
Nominal power [W]	70
Nominal lamp voltage [V]	90


Logistic data

DUN Code 159	994100017612
EAN Code 599	94100017615
Pack Quantity 25	
Layer quantity 375	5 EUR, 500 UK
Layer quantity EUR 375	5
Layer quantity UK 500)
Pallet quantity EUR (PC) 187	75
Pallet quantity UK (PC) 250	00
Outer case size 219	9 x 218 x 208 (mm)
Product status Ava	ailable

Lumen maintenance data

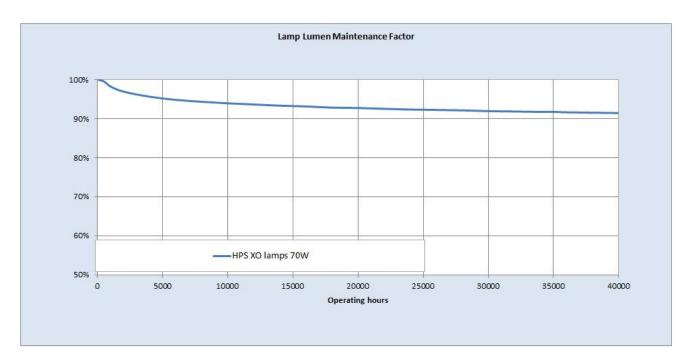

Survival data

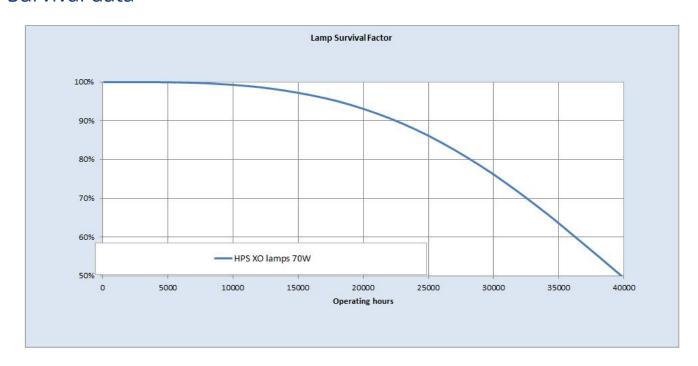



Tulox XO Tubular Clear LU70/90/XO/T/E27 TU 93102235

Downloads & Links

Go to the catalog site (HTTP)
Product datasheet (PDF)
Datasheet (PDF)
High-res images / Technical drawings (HTTP)

