


PRODUCT PRESENTATION

- **Slimline**
- **Flush mount**
- **High corrosion resistance**
- **Delivered with armature plate**
- **No mechanical wear**
- **No residual magnetism**
- **Ease of installation**
- **Recommended for internal or external use**
- **Fail safe** (Door unlocked when power off)
- **Holding force: 300 kg**
- **Built-in varistor: Built-in electronic protection to eliminate back EMF**
- **Dimensions (L x W x D): 300 x 32 x 28 mm**
- **Armature plate dimensions (L x W x D): 250 x 32 x 11 mm**
- **Power supply: 12-24V dc**
- **Consumption: 500 mA @ 12V dc**
250 mA @ 24V dc



IP42

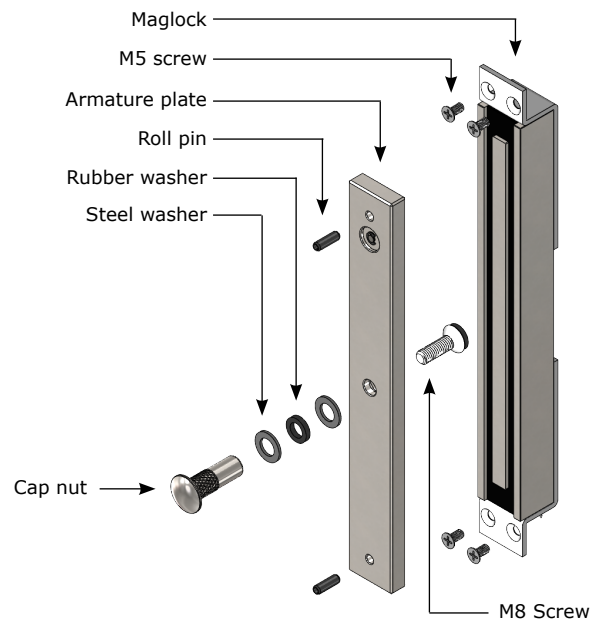


WEEE & RoHS



CE Certification

PACKAGE CONTENT

					
Magnetic lock	Armature plate	5x16 Roll pin	M5X8 Screw	Steel washer	Rubber washer
1	1	2	4	2	1
					
M8x35 Screw	Cap nut	Allen Key	Manual		
1	1	1	1		



ELECTRICAL CONNECTIONS



12V dc Default setup

Terminal block	Correspondence
+	12 or 24V dc
-	0V


Voltage selection jumpers

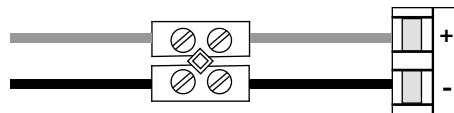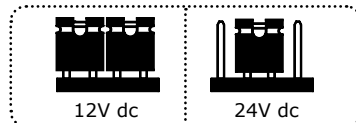

Recommended power supplies

Voltage	ADC335	ADC612S
12V dc	ADC335	ADC612S
24V dc	ADC324	ADC624S

MOUNTING RECOMMENDATIONS

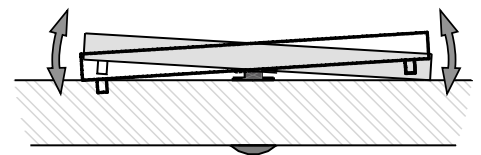

Armature plate

- It is vital that the magnetic lock and armature plate are securely fixed to their supports.
- The magnetic lock and the armature plate must be aligned.
- The armature plate must be mounted "floating" around the central mounting screw to compensate for any misalignment of the door

IMPORTANT NOTE

- Check the jumper position before connecting the lock to the input current. A wrong position could damage the lock. This type of damage is not covered by the warranty.
- Make sure that the magnet and the armature meet evenly over their entire mating surfaces.

The Armature plate must be able to pivot slightly about its center mounting screw to compensate for any door misalignment.

CDVI FRANCE + EXPORT
31, av. du Général Leclerc
93500 PANTIN - France
Phone +33 (0)1 48 91 01 02
www.cdvi.com

CDVI SWEDEN
[SWEDEN - DENMARK -
NORWAY FINLAND]
Phone +46 (0)31 760 19 30
www.cdvi.se

CDVI UK
[UNITED KINGDOM - IRE-
LAND]
Phone +44 (0)1628 531300
www.cdvi.co.uk

CDVI AMERICAS
[CANADA - USA]
Phone +1 (450) 682 7945
www.cdvi.ca

CDVI BENELUX
[BELGIUM - NETHERLAND -
LUXEMBOURG]
Phone +32 (0) 56 73 93 00
www.cdvi-belux.com

CDVI SUISSE
Phone +41 (0)21 882 18 41
www.cdvi.ch

CDVI IBÉRICA
[SPAIN - PORTUGAL]
Phone +34 (0)935 390 966
www.cdvi-iberica.com

CDVI ITALIA
Phone +39 0321 90 573
Fax: +39 0321 90 8018
www.cdvi.it

CDVI TAIWAN
Phone +886 (0)42471 2188
www.cdvi-china.cn

CDVI CHINA
Phone +86 10 84606132/82
www.cdvi-china.cn

CDVI MAROC
Phone +212 5 2248 0940
www.cdvi.ma


CDVI POLSKA
Phone +48 12 659 23 44
www.cdvi.com.pl

CDVI GERMANY
+49 (0) 175 2932 901
www.cdvi.de

www.cdvi.com

PRÉSENTATION DU PRODUIT

- **Étroite**
- **Encastrée**
- **Résistance à la corrosion**
- **Livrée avec contre-plaque**
- **Pas d'usure mécanique**
- **Pas de magnétisme résiduel**
- **Facilité d'installation**
- **Préconisée en intérieur**
- **Libère l'accès en cas de coupure de courant**
- **Force de rétention : 400kg**
- **Varistance incorporée : Protection électronique intégrée contre l'effet de self**
- **Dimensions (L x l x P) : 300 x 32 x 28 mm**
- **Dimensions contre-plaque (L x l x P) : 250 x 32 x 11 mm**
- **Alimentation : 12-24V DC**
- **Consommation : 500 mA en 12V DC
250 mA en 24V DC**

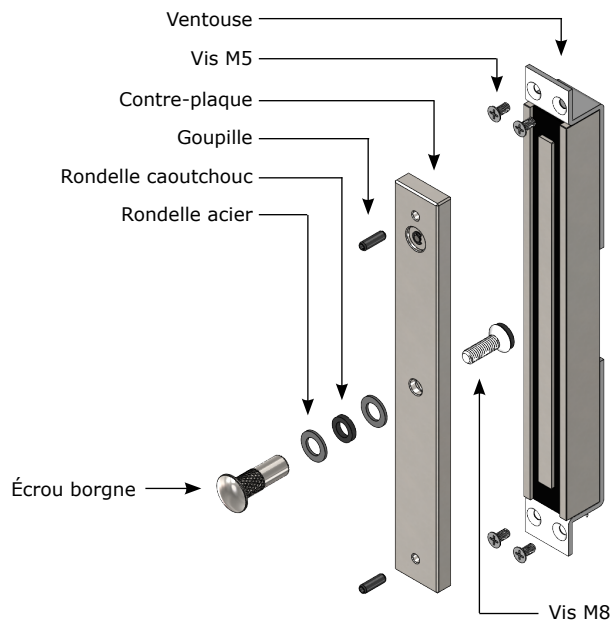

IP42



DEEE & RoHS



Certification CE

ÉLÉMENTS INCLUS

					
Ventouse encastrée	Contre-plaque	Goupille 5x16	Vis M5X8	Rondelle acier	Rondelle caoutchouc
1	1	2	8	2	1
					
Vis M8x35	Écrou borgne	Clé Allen	Notice		
1	1	1	1		



RACCORDEMENTS



Réglage usine 12V DC

Bornier	Correspondance
+	12 ou 24V DC
-	0V


Cavaliers de sélection de tension

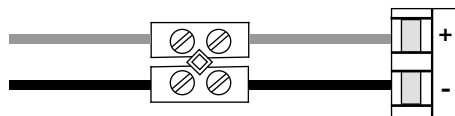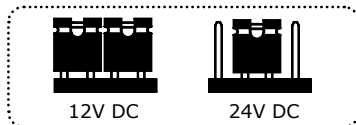

Alimentations recommandées

Tension		
12V DC	ADC335	ADC612S
24V DC	ADC324	ADC624S

RECOMMANDATIONS DE MONTAGE

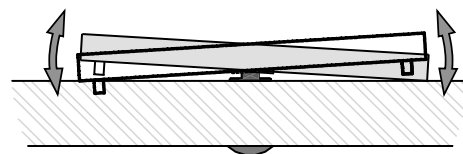

Contre-plaque

- Il est vital de fixer solidement la ventouse et la contreplaque sur leurs supports.
- La ventouse et la contre-plaque doivent être impérativement alignées.
- La contre-plaque doit être montée "flottante" autour de la vis centrale de montage pour compenser un mauvais alignement de la porte.

NOTE IMPORTANTE

- Vérifier la position du cavalier avant de brancher la ventouse au courant d'entrée. Une position incorrecte peut endommager la ventouse. Ce type de dommage n'est pas couvert par la garantie.
- La ventouse et la contre-plaque doivent être impérativement alignés.

La contre-plaque doit être montée "flottante" autour de la vis centrale de montage pour compenser un mauvais alignement de la porte.

CDVI FRANCE + EXPORT
31, av. du Général Leclerc
93500 PANTIN - France
Phone +33 (0)1 48 91 01 02
www.cdvi.com

CDVI SWEDEN
[SWEDEN - DENMARK -
NORWAY FINLAND]
Phone +46 (0)31 760 19 30
www.cdvi.se

CDVI UK
[UNITED KINGDOM - IRE-
LAND]
Phone +44 (0)1628 531300
www.cdvi.co.uk

CDVI AMERICAS
[CANADA - USA]
Phone +1 (450) 682 7945
www.cdvi.ca

CDVI BENELUX
[BELGIUM - NETHERLAND -
LUXEMBOURG]
Phone +32 (0) 56 73 93 00
www.cdvi.belux.com

CDVI SUISSE
Phone +41 (0)21 882 18 41
www.cdvi.ch

CDVI IBÉRICA
[SPAIN - PORTUGAL]
Phone +34 (0)935 390 966
www.cdviiberica.com

CDVI ITALIA
Phone +39 0321 90 573
Fax: +39 0321 90 8018
www.cdvi.it

CDVI TAIWAN
Phone +886 (0)42471 2188
www.cdvichina.cn

CDVI CHINA
Phone +86 10 84606132/82
www.cdvichina.cn

CDVI MAROC
Phone +212 5 2248 0940
www.cdvi.ma

CDVI POLSKA
Phone +48 12 659 23 44
www.cdvi.com.pl

CDVI GERMANY
+49 (0) 175 2932 901
www.cdvi.de

www.cdvi.com