

Lightbar VX250-SP



ECE certified - ECE R112

The necessary tests and approvals were carried out and an ECE type approval was granted. ECE reference number: 30



Spot Beam

Designed for far field illumination. For a focused illumination in the far field of the vehicle with a light beam up to 318 m length. See and be seen with OSRAM



Slim Design

Slim design for a discreet appearance when mounted on the vehicle



on-road & off-road

Versatile applicable and flexible in use. On-road & off-road, in terrain, at work and in the spare time.

Product datasheet



Bringing light to life with OSRAM LEDriving driving and working lights

Considerable foresight on dark country roads, forest paths, off the beaten tracks, off-road and on-road- this can be achieved with the OSRAM LEDriving Lightbar VX250-SP. With its 9 powerful, high-performance long-life LEDs, the OSRAM LEDriving Lightbar VX250-SP has a range of up to 318 meter and thus offers the driver impressive foresight on-road and off-road. Even in dim light and reduced visibility due to external environmental influences, the OSRAM LEDriving Lightbar VX250-SP with up to 6000 Kelvin can provide conditions similar to daylight. The power package with up to 1500 lumens of luminosity scores with highest optical efficiency and homogeneous light distribution. This results in the possibility of an improved view for you and the improved visibility of your vehicle by other road users, and consequently also increased safety on-road and off-road. Whether on-road or off-road - The OSRAM LEDriving Lightbar VX250-SP impresses with its powerful performance and a long service life with up to 5000 hours. Versatile applicable, it defies numerous environmental influences and, thanks to high-quality materials such as the aluminum housing and the stable polycarbonate lens, it is particularly light and at the same time robust and resistant. The OSRAM LEDriving Lightbar VX250-SP has been tested and validated with the IP-Protection Class IP67 in our DIN certified environmental simulation laboratory for extreme external influences regarding water, dust, impacts, heat, cold and permanent vibration. The integrated driver and the thermal management system regulate the temperature of the LED Lightbar and can thus prevent damage from overheating. The polarity protection inhibits the wrong polarity of the voltage supply and can thus prevent possible damage by automatically switching off the LEDs. On-road and off-road, the OSRAM LEDriving Lightbar VX250-SP is an effective and efficient addition to your vehicle. No registration or entry in the vehicle documents is necessary for these ECE-certified LED driving lights²⁾. ECE reference number: 30The OSRAM LEDriving Lightbar VX250-SP can be attached to cars, trucks, agricultural machinery, farm machinery, commercial vehicles, construction vehicles, caravans, off-road vehicles and quads²⁾. The OSRAM LEDriving VX250-SP is versatile applicable and flexible in use.²⁾ OSRAM LEDriving Driving Lights are approved according to ECE regulations and may therefore be installed and operated on public roads. Please note: Special installation regulations apply. In addition to ECE approval of the product, individual special requirements and legislation of the countries must be observed.

Product datasheet

Technical data

Product information

Order reference	LEDDL115-SP
Application (Category and Product specific)	Additional high beam application

Electrical data

Nominal voltage	12/24 V
Nominal wattage	27.00 W
Test voltage	13.5 V


Photometrical data

Luminous flux	1500 lm
Color temperature	6000 K
Light distance at 1lx	318 m

LED module information

Number of LEDs per module	9
---------------------------	---

Dimensions & weight

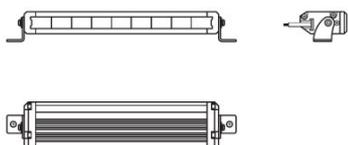


Product weight	960.00 g
Length	275 mm
Width	36 mm
Height	67 mm

Lifespan

Lifespan Tc	5000 h
Guarantee	2 years

Product datasheet

Additional product data

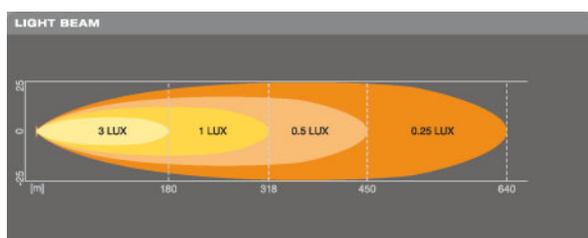

Luminous intensity distribution

Connector to lamp	Open wire
Product remark	Beam Pattern: Spot

Capabilities

Technology	LED ¹⁾
------------	-------------------

¹⁾ Light-emitting diode application

Certificates & standards

Standards	ECE R10, R112
Approval marks – approval	E4 approval
Type of protection	IP67

Country specific categorizations

Order reference	LEDDL115-SP
-----------------	-------------

Logistical data

Commodity code	851220009000
----------------	--------------

Logistical Data

Product datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172141888	Lightbar VX250-SP	Folding carton box 1	422 mm x 110 mm x 123 mm	5.71 dm ³	1187.90 g
4062172141895	Lightbar VX250-SP	Shipping carton box 4	437 mm x 242 mm x 274 mm	28.98 dm ³	5222.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File
 User instruction LEDriving Lightbar VX250-SP
 Movie application OSRAM Quality Testing LEDriving working and driving lights (EN)
 Movie application OSRAM LEDdriving and working lights Imagefilm (EN)
 Movie application LEDriving D&W Image Video Bringing light to life (EN)
 Movie application LEDriving Driving & Working Lights Reference Video (EN)
 Movie application OSRAM LEDriving driving and working lights FX1000-CB SM (EN)
 360 Degree Image LEDriving Lightbar VX250-SP LEDDL115-SP

Legal advice:

The installation of the OSRAM LEDriving Lightbar VX250-SP is fully ECE compliant and therefore registration free. This does not include individual custom requirements of countries, in addition to the standardized ECE certification of the product.

1) Precise terms and conditions at: www.osram.com/am-guarantee

2) OSRAM LEDriving Driving Lights are approved according to ECE regulations and may therefore be installed and operated on public roads. Please note: Special installation regulations apply. In addition to ECE approval of the product, individual special requirements and legislation of the countries must be observed.

Refer to www.osram.com/am-guarantee for precise conditions

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

