


ART.: 3112562

SL764+ PL LV S/C

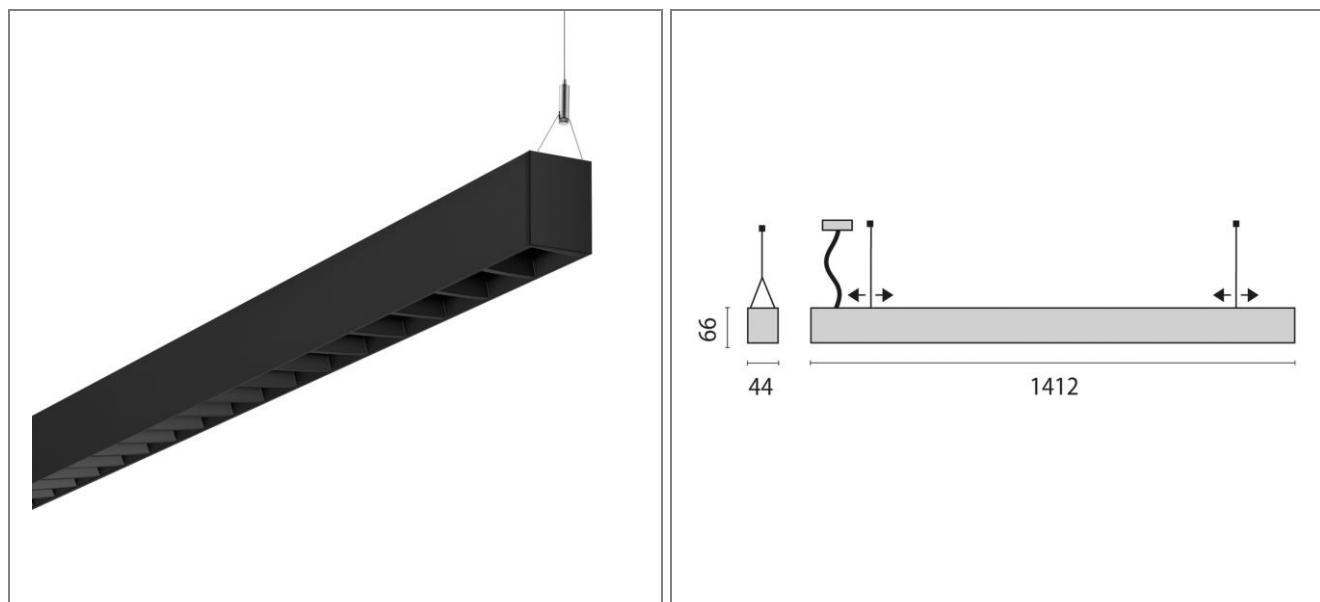

Art.: 3112562, SL764+ PL L 45 S/B 930 BK9005 LV, Suspended, LED luminaire for indoor, comprising: Extruded aluminium profile housing, die-cast aluminium end caps, painted. Black grid for maximum luminaire efficiency, glare reduction and a high uniformity. Streamlined, simple design with flush end caps. High-quality workmanship of profile connections for a perfect look. High economic efficiency thanks to luminaire efficiencies of up to 155 lm/W. Predominantly direct light distribution. Through-wiring designed. Simple and convenient lighting installation. Interchangeable lighting inserts. Colour rendering index Ra > 90. Colour tolerance according to MacAdam  $\leq 3$  SDCM. Complete with steel suspension cable (1.5 m), transparent power cable and canopy. Many other luminaire designs and strip light configurations are available at [www.light-performer.com](http://www.light-performer.com).

<b>Connected load</b>	51 W
<b>Luminous flux</b>	5960 lm
<b>Efficiency</b>	117 lm/W
<b>Colour temperature</b>	3000K
<b>Colour rendering (CRI)</b>	90
<b>IP class</b>	20
<b>Nominal voltage</b>	220 – 240 V
<b>Colour</b>	BK-RAL9005
<b>UGR</b>	$\leq 16$
<b>Glare control</b>	✓

