#### Part number

# **CXMA 1.5**





Male crimp contact, CX series, 40 A, turned silver plated, wire cross section 1,5 mm<sup>2</sup>, AWG 16

Product description	
Product type	Crimp contact
Series	CX
Gender	Male
Technical data	
Current	40 A
Wire cross-section	1,50 mm <sup>2</sup>
AWG size	16
Contact type	Turned silver plated
Further technical details	
Weight	3,00 g
Conductors stripping length	9 mm


Material properties			
Main material	Copper alloy		
D-11	Compliant with exemption		
RoHs conformity	6(c): copper alloy containing up to 4% lead by weight		
China RoHs - EFUP	50		
REACH SVHC substances	Yes Lead		
SCIP number	C0979fba-9907-458f-a94a-db781440f273		
Approvals / Standards			
Certifications	CSA, EAC		
UL	ECBT2		
cUL	ECBT8		
General ordering information			
EAN13 code	8015747042758		
eCl@ss 8.1	27440204		
ETIM 7.0	EC000796		
Packaging Information			
Packaging length	112,00 mm		
Packaging height	95,00 mm		
Packaging width	117,00 mm		
Packaging weight	1,39 kg		
Packaging volume	1,24 dm³		
Packaging description	Carton box		
Packaging quantity	400 Pcs		
Packaging EAN code	8015747207072		
Sub-packaging length	50,00 mm		
Sub-packaging height	44,00 mm		
Sub-packaging width	50,00 mm		
Sub-packaging weight	0,17 kg		
Sub-packaging volume	0,11 dm³		
Sub-packaging description	Plastic box		
Sub-packaging quantity	50 Pcs		
Sub-packaging EAN barcode	8015747042765		

#### Part number

# **CXMA 1.5**



#### Catalogue drawings

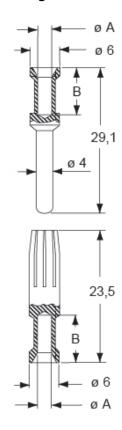

#### CXF and CXM contacts

conductor cross-sectional area (mm²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

#### California Proposition 65 Information



## WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.