1SNK705151R0000 - ACTIVE

ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK705151R0000 Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 3 Position, DIN Rail, ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: Ground

Modular Terminal Block Product Type: PI-Spring Terminal Block

Rated Cross Section: 2.5 mm²

Primary Product Color: Green & Yellow

Features

Product Type Features

Modular Terminal Block Product Type

Configuration Features

Gauge Type

PI-Spring Terminal Block

A2 / 2.3 mm Dia.

Number of Levels	1
Number of Circuits	1
Block Function	Ground
Number of Positions	3
Electrical Characteristics	
Impulse Withstanding Voltage Rating (IEC)	8000 V
Dielectric Test Voltage	2200 V
Short-Time Withstanding Current Rating @ 1s	300 A
Body Features	
Product Weight	11.9 g[.468 oz]
Primary Product Color	Green & Yellow
Mechanical Attachment	
DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail
Housing Features	

C For support call+1 800 522 6752

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 3 Position, DIN Rail, ENTRELEC SNK



Housing Material	Polyamide
Dimensions	
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.2 – 4 mm²
Main Circuit Capacity - Twin Ferrule per Spring Clamp	26 – 20 AWG
Wire Stripping Length	11 mm[.433 in]
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.22 – 2.5 mm²
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 – 14 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 2.5 mm²
Tool Size	3.5 mm[.138 in]
Product Depth	40.3 mm
Product Length	40.3 mm
Product Height	71.2 mm
Rated Cross Section	2.5 mm ²
Product Spacing	5.2 mm[.205 in]
Usage Conditions	
Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5-40 °C[23-104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Industry Standards	
IP Rating	IP20
UL Flammability Rating	UL 94V-0
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

C For support call+1 800 522 6752

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 3 Position, DIN Rail, ENTRELEC SNK



Free


Solder Process Capability


Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

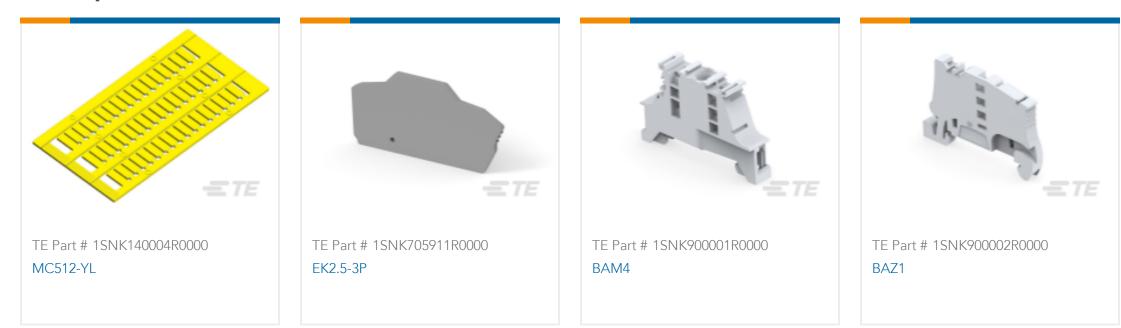

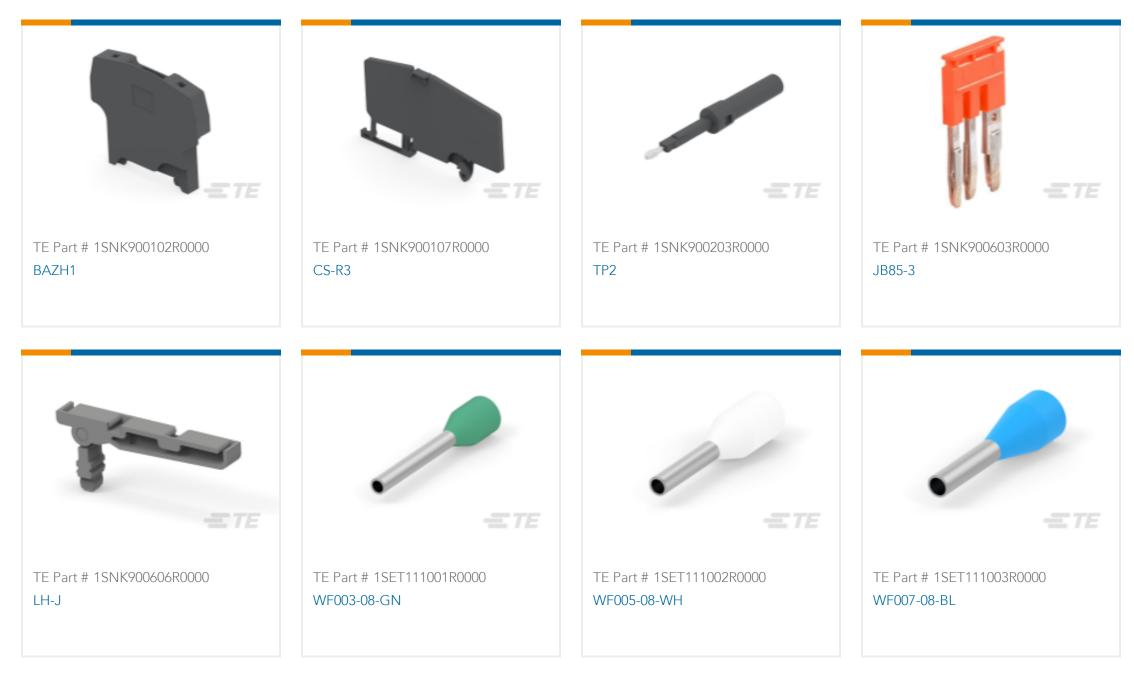

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 3 Position, DIN Rail, ENTRELEC SNK



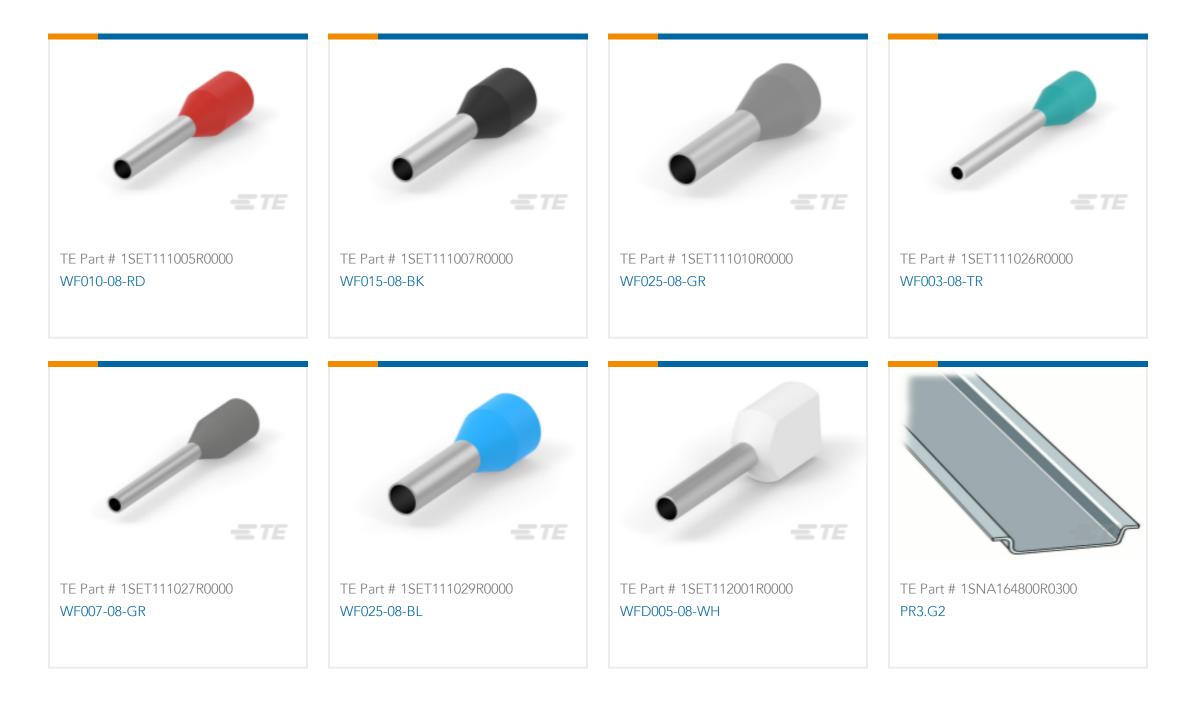

Also in the Series ENTRELEC SNK





Terminal Block & Strip Conducting



Terminal Block & Strip Insulating

Accessories(67)

Accessories(30)

Customers Also Bought



Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 3 Position, DIN Rail, ENTRELEC SNK





Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK705151R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705151R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705151R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

ENTRELEC Terminal Block - Master Catalog

English

ZK2.5-PE-3P

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Agency Approvals Agency Approval Document

English