



### Electrical features

Maximum operating current ( $\leq 440V$ ) A 9

### Contact characteristics

Operational current Ie AC-3 ( $\leq 440V \leq 55^{\circ}C$ ) A 9

Rated operational power AC-3 ( $T \leq 55^{\circ}C$ )	Voltage	Power (kW)	Current (A)
	230V	2.2	9
	400V	4	9
	415V	4.3	9
	440V	4.5	9
	500V	5	9
	690V	5	9

Built-in auxiliary contacts

NO	0
NC	1

### UL technical data

Maximum UL/CSA horsepower ratings single-phase	Voltage	HP	Current (A)
	110V-120V	0.5	9
	220V-240V	1.5	9

Maximum UL/CSA horsepower ratings three-phase, 3-pole


200V-208V	HP	2
220V-240V	HP	3
440V-480V	HP	5
550V-600V	HP	5

### Mechanical features


Terminals type Clamp screw

Weight g 394

### Dimensions

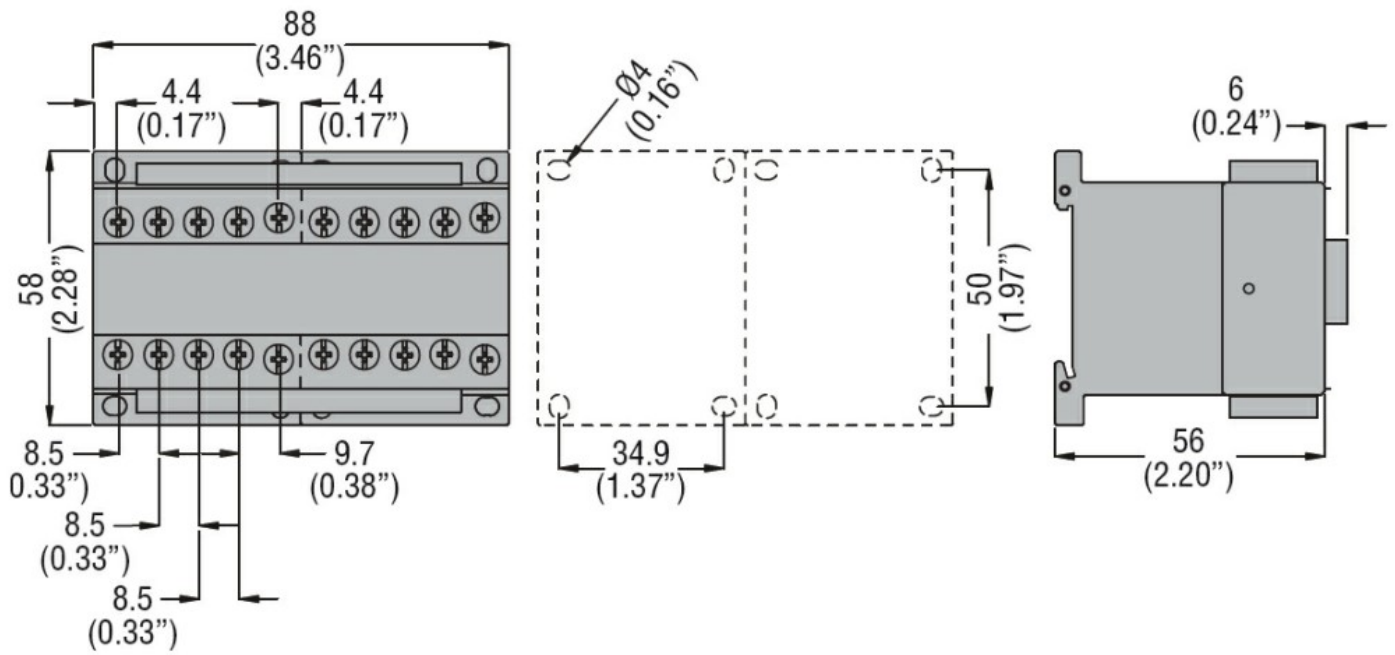

Wiring diagrams

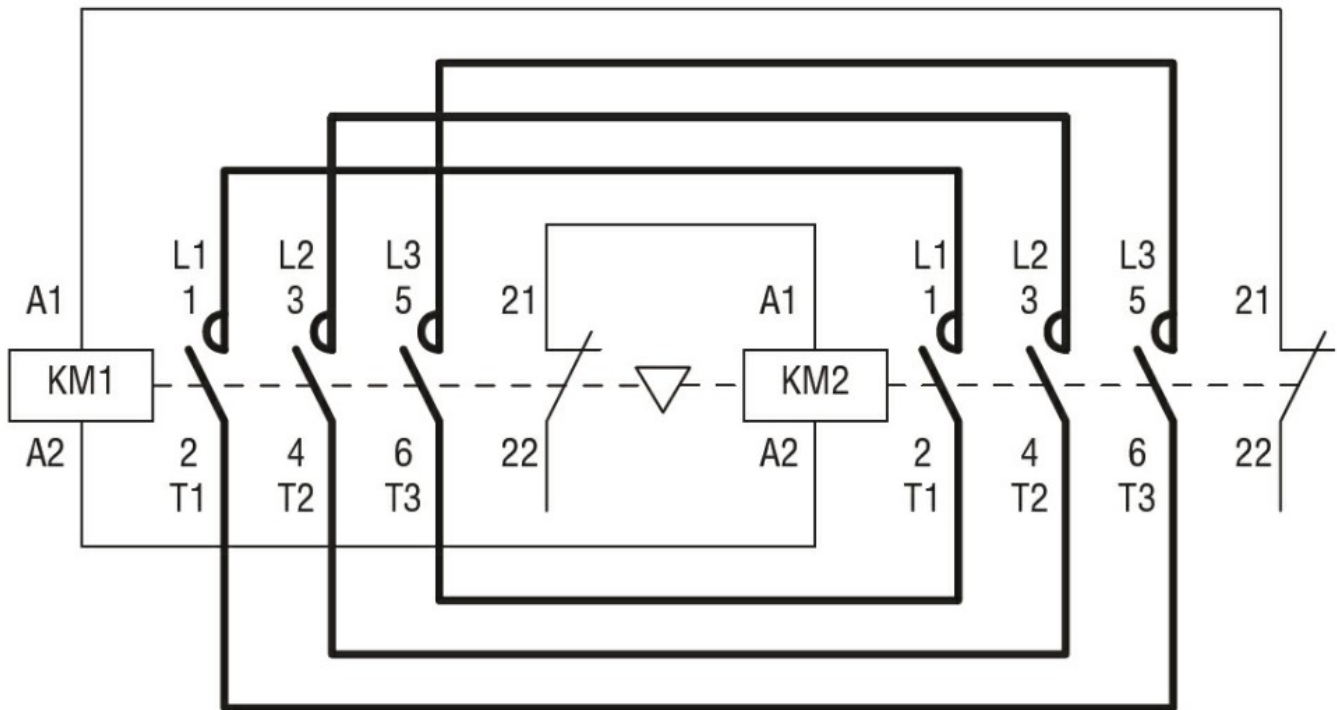

Certifications and compliance

Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination