



Electrical features

Supplies voltage

Type of system		Three phase
Rated supply voltage	V	208...415VAC
auxiliary supply voltage (Us)		208...240VAC
Rated frequency	Hz	50/60

Rated starter current Ie	A	640
--------------------------	---	-----

Rated motor power in-line

IEC ratings (T≤40°C)

230VAC	kW	200
400VAC	kW	355
500VAC	KW	440

UL ratings (T≤40°C)

220-240VAC	HP	250
380-415VAC	HP	400
440-480VAC	HP	500

Number of controlled phases	Nr.	3
-----------------------------	-----	---

Built-in bypass	No, predisposed for external bypass contactor
-----------------	---

Cooling System	Forced
----------------	--------

Programming interface

Display	Backlit LCD 2x16 character
---------	----------------------------

Programming with NFC technology	No
---------------------------------	----

Optical port	No
--------------	----

Startup and stop settings

Startup method	Torque or voltage ramp with current limitation
----------------	--

Stop method	Torque ramp, voltage ramp, free-wheel stop
-------------	--

Braking method	DC dynamic with external relay
----------------	--------------------------------

Protections

Auxiliary supply protection	Voltage too low
-----------------------------	-----------------

Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage
-------------------------	--

Motor protection	Overload at starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run), overtemperature, starting too long
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, maintenance request

Functions	
Built-in bypass	No
Built-in display and keypad	No
Languages	4
View measurements	Yes
Torque control	Yes
Adjustable current limit	Yes
Dynamic braking	Yes
Kick Start function	Yes
Motor overload electronic protection	Yes
Motor protection PTC input	Yes
Protection against phase loss	Yes
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	Yes
Protection against low load	Yes
Programmable alarm	Yes
Digital inputs	3
Analog inputs	1
Digital outputs	4
Analog output	1
Monitoring communication	Yes
Optical port for programming	No
Event log	No
Motor hour counter	Yes
Startup counter	Yes
Clock calendar	Yes
Remote external keypad	Yes

Input and Output

Digital inputs

Number of digital input	Nr.	3 (2 digital inputs + 1 digital/analog input)
Digital input type		24VDC (no need for external feeder) 1 input for start, 1 input programmable (stop, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor), 1 input programmable multifunction (OFF, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor, cascade starting, 0-10V ramp, 2-10V ramp, 0-10V start-stop, PT100 start-stop, PTC protection)
Digital input functions		(OFF, free-wheel stopping, external alarm, motor preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second motor, cascade starting, 0-10V ramp, 2-10V ramp, 0-10V start-stop, PT100 start-stop, PTC protection)

Analog inputs

Number of analog input	Nr.	1 (digital/analog) 0-10VDC (0-20mA with external resistor 500Ω)
Analog input type		

	Analog input functions		Motor protection via PTC probes, acceleration and/or deceleration ramp via analog input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable and disable, PT100 input thresholds for motor starting and stopping and PT100 input thresholds for programmable relay enable and disable
<hr/>			
Digital outputs	Number of digital output	Nr.	4
	Digital output arrangement		3 x 1 NO (SPST) + 1 C/O (SPDT) Ratings: 5A 250VAC AC1, 2A 250VAC AC15 C/O output for global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)
	Digital output functions		
<hr/>			
Analog outputs	Number of analog output	Nr.	1
	Analog output type		0...20mA, 4...20mA (0...10V with external resistor 500Ω) Current, torque, motor thermal status, power factor and active power
	Analog output functions		


Ambient conditions

Temperature

Operating temperature

min °C -10

	max	°C	+55°C (with current derating >45°C of 1.5%/°C)
Storage temperature	min max	°C °C	-30 +70
Max altitude		m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity		%	95% without condensation or dripping
Pollution degree			3
Housing			
Mounting			Screw-fixing
IP degree of protection			IP00
Dimensions (W x H x D)	mm		790 x 650 x 430
Weight	Kg		106
Dimensions			

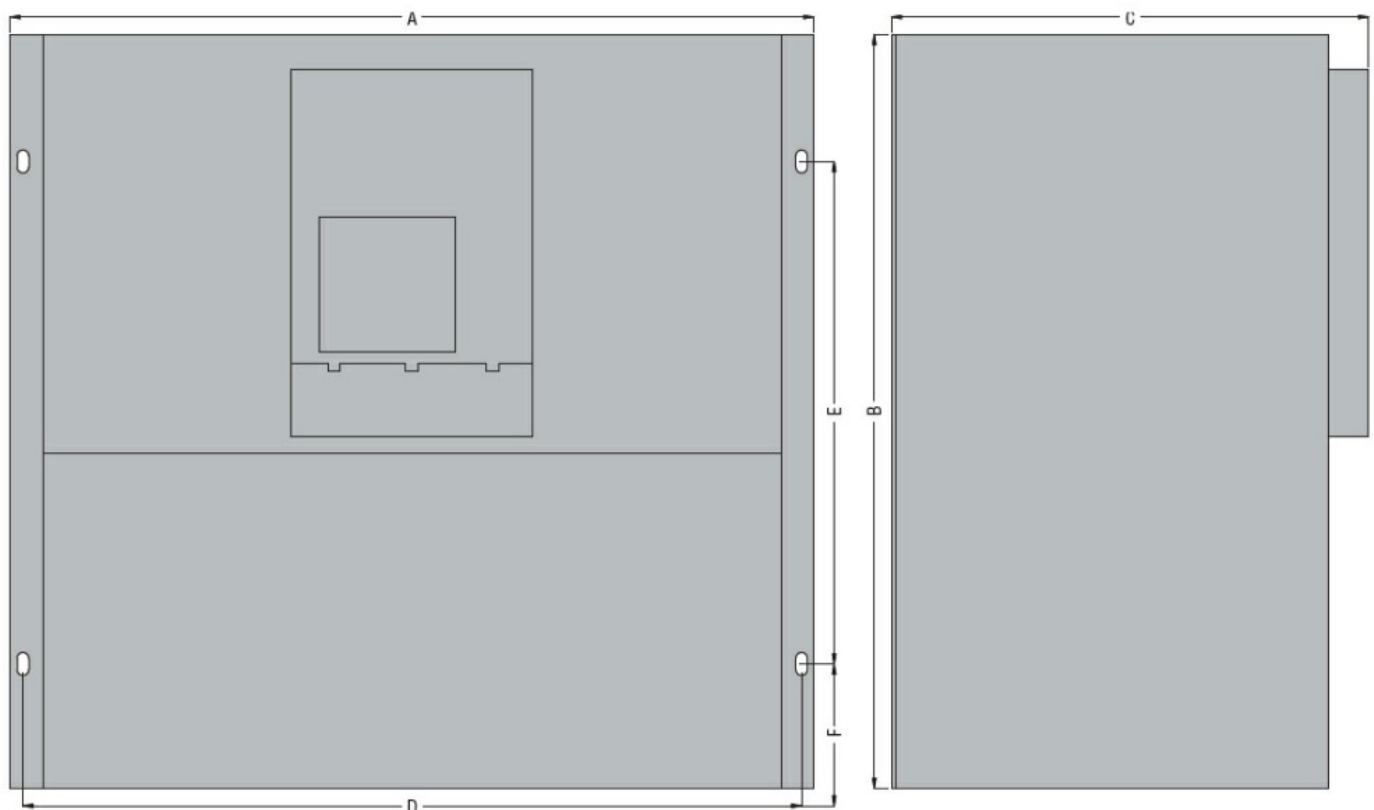

TYPE	A	B	C	D	E	F
ADX 0310	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0365	640 (25.20")	600 (23.62")	380 (14.96")	620 (24.41")	400 (15.75")	100 (3.94")
ADX 0470	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0568	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0640	790 (31.10")	650 (25.59")	430 (16.93")	770 (30.31")	450 (17.72")	100 (3.94")
ADX 0820	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	①
ADX 1200	910 (35.83")	950 (37.40")	442 (17.40")	830 (32.68")	920 (36.22")	①

① Consult Customer Service; see contact details on inside front cover.

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-2

Certificates

EAC

ETIM classification

ETIM 8.0

EC000640 - Soft
starter