



General characteristics

| | |
|-------------------|--|
| Switching diagram | 03 - ON/OFF spring return switch 3 poles |
| N° of elements | 2 |
| Mounting form | P - Plastic enclosure with black handle |

Contact characteristics

| | | | |
|---|------------------|----|-----------|
| Rated insulation voltage U_i | IEC/EN | V | 690 |
| | UL/CSA | V | 600 |
| Rated impulse withstand voltage U_{imp} | | kV | 6 |
| Conventional free air thermal current I_{th} | IEC/EN | A | 16 |
| | UL/CSA | A | 15 |
| Rated operational voltage | | V | 480 |
| Rated operational impulse voltage | | kV | 4 |
| Maximum fuse size for short-circuit protection I_n (gG) | 10kA | A | 16 |
| | 15kA | A | 10 |
| | 25kA | A | 10 |
| Rated short time current I_{cw} | 1s | kA | 200 |
| | | | 10/5 mA/V |
| Conductivity | | | 10/5 mA/V |
| Operational current I_e IEC/EN | AC1/AC21A | A | 16 |
| | AC15 | | |
| | 110V | A | 10 |
| | 220/230V | A | 8 |
| | 380/400V | A | 4 |
| | 660/690V | A | 1.5 |
| Rated operational power in AC | Three-phase AC-3 | | |
| | | | |
| | 220/230V | kW | 2.5 |
| | 380/440V | kW | 4 |
| | 500/690V | kW | 5.5 |
| Single-phase AC-3 | | | |
| | | | |
| | 110V | kW | 0.8 |
| | 220/230V | kW | 1.5 |
| | 380/440V | kW | 2.2 |
| Three-phase AC23A | | | |
| | | | |
| | 220/230V | kW | 3 |
| | 380/440V | kW | 5.5 |
| | 500/690V | kW | 7.5 |

Single-phase AC23A

| | | |
|----------|----|-----|
| 110V | kW | 0.8 |
| 220/230V | kW | 1.7 |
| 380/440V | kW | 3 |

Rated operational current in DC

DC21A

| | | |
|------|---|------|
| 48V | A | 12 |
| 60V | A | 12 |
| 110V | A | 4 |
| 220V | A | 0.6 |
| 440V | A | 0.25 |

DC23A (poles in series)

| | | |
|------|---|--------|
| 24V | A | 10 (1) |
| 48V | A | 10 (2) |
| 60V | A | 10 (3) |
| 110V | A | 5 (3) |
| 220V | A | 5 (4) |

DC13

| | | |
|------|---|------|
| 24V | A | 12 |
| 48V | A | 10 |
| 60V | A | 8 |
| 110V | A | 1 |
| 220V | A | 0.4 |
| 440V | A | 0.15 |

Power dissipation

W 0.8

Mechanical features

Terminals screw

M3

Tightening torque for terminals max

Nm 0.5

Conductor size

AWG - Rigid cable

| | | |
|-----|-----|----|
| min | AWG | 20 |
| Max | AWG | 12 |

AWG - Flexible cable

| | | |
|-----|-----|----|
| min | AWG | 20 |
| Max | AWG | 14 |

Conductor size (IEC) - Flexible cable

| | | |
|-----|-----------------|-----|
| min | mm ² | 0.5 |
| Max | mm ² | 2.5 |

Conductor size (IEC) - Rigid cable

| | | |
|-----|-----------------|-----|
| min | mm ² | 0.5 |
| Max | mm ² | 2.5 |

Mechanical life

cycles 3x10⁶

UL technical data

Motor power for direct-on-line control

for three-phase motor

| | | |
|------|----|-----|
| 120V | HP | 1.5 |
| 240V | HP | 3 |

for single-phase motor

| | | |
|------|----|-----|
| 120V | HP | 0.5 |
| 240V | HP | 1 |

Ambient conditions

Temperature

Operating temperature

min °C -25

| | | | |
|---------------------|-----|----|-----|
| Storage temperature | max | °C | +55 |
| | min | °C | -40 |
| | max | °C | +70 |

Resistance & Protection


| | |
|---------------------|------|
| Frontal IP degree | IP65 |
| Terminals IP degree | IP00 |

Dimensions

| Series | Enclosure size | Number of elements | | Dimensions | | | | | | | | | | Cable entry | Protection degree |
|----------|----------------|--------------------|-----|------------|-----|---------|---------|-----|----|----|------|------|-------|------------------|-------------------|
| | | L | L1 | A | A1 | C | C1 | D | F | M | N | L | L1 | | |
| 7GN12ⓐ | 75x75ⓐ | 1-2 | 3-4 | 75 | 75 | 50 | 64 | 4.5 | 19 | 14 | 28 | 57.5 | 79.8 | 4xPG13.5 | IP65 |
| 7GN20ⓐ | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN25ⓐ | | 1 | 2-3 | | | | | | | | | | | | |
| 7GN12ⓐ | 90x90 | 1-3 | 4-6 | 90 | 90 | 79 | 63 | 4.5 | 25 | 19 | 30 | 71.3 | 98.3 | 4xPG16 | IP65 |
| 7GN20ⓐ | | 1-3 | 4-6 | | | | | | | | | | | | |
| 7GN25ⓐ | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN32 | | 1 | 2-3 | | | | | | | | | | | | |
| 7GN40 | 1 | 2-3 | | | | | | | | | | | | | |
| 7GN12 | 110x110 | 1-4 | 5-8 | 110 | 110 | 98.4 | 83 | 4.5 | 32 | 21 | 39.5 | 85.5 | 119.5 | 4xPG21 | IP65 |
| 7GN20 | | 1-4 | 5-8 | | | | | | | | | | | | |
| 7GN25 | | 1-3 | 4-5 | | | | | | | | | | | | |
| 7GN32ⓐ | | 1-2 | 3-5 | | | | | | | | | | | | |
| 7GN40ⓐ | | 1-2 | 3-5 | | | | | | | | | | | | |
| 7GN63 | 1-2 | 3-4 | | | | | | | | | | | | | |
| 7GN32ⓐ | 125x175 | 1-2 | 3-4 | 125 | 175 | 146 | 112 | 5.5 | 32 | 21 | 68 | 84.3 | 118.3 | 4xPG21 2xPG11 | IP65 |
| 7GN40ⓐ | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN63ⓐ | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN125 | | 1 | 2 | | | | | | | | | | | | |
| 7GN32 | 198x248 | - | 1-7 | 198 | 248 | 190-210 | 140-180 | 5.5 | 32 | 35 | 104 | - | 166.5 | 6xPG16- 21-29 | IP65 |
| 7GN40 | | - | 1-7 | | | | | | | | | | | | |
| 7GN63ⓐ | | - | 1-6 | | | | | | | | | | | | |
| 7GN125ⓐⓐ | | - | 1-4 | | | | | | | | | | | | |

ⓐ Standard dimensions for cam switch in plastic enclosure with black handle (P).
ⓐ Standard dimensions for cam switch in plastic enclosure with red/yellow handle padlockable in 0 (P25).

Wiring diagrams

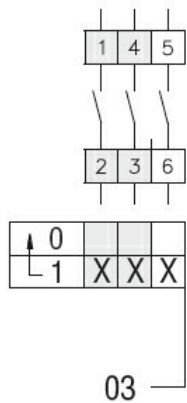

Certifications and compliance

Compliance

- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-3
- IEC/EN/BS 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete