



General characteristics

| | |
|-------------------|---|
| Switching diagram | 92 - ON/OFF switch 4 poles |
| N° of elements | 2 |
| Mounting form | P - Plastic enclosure with black handle |

Contact characteristics

| | | | |
|---|------------------|----|-----------|
| Rated insulation voltage U_i | IEC/EN | V | 690 |
| | UL/CSA | V | 600 |
| Rated impulse withstand voltage U_{imp} | | kV | 6 |
| Conventional free air thermal current I_{th} | IEC/EN | A | 20 |
| | UL/CSA | A | 20 |
| Rated operational voltage | | V | 480 |
| Rated operational impulse voltage | | kV | 4 |
| Maximum fuse size for short-circuit protection I_n (gG) | 10kA | A | 20 |
| | 15kA | A | 16 |
| | 25kA | A | 16 |
| Rated short time current I_{cw} | 1s | kA | 250 |
| | | | 10/5 mA/V |
| Conductivity | | | 10/5 mA/V |
| Operational current I_e IEC/EN | AC1/AC21A | A | 20 |
| | AC15 | | |
| | 110V | A | 10 |
| | 220/230V | A | 8 |
| | 380/400V | A | 6 |
| | 660/690V | A | 1.5 |
| Rated operational power in AC | Three-phase AC-3 | | |
| | | | |
| | 220/230V | kW | 3 |
| | 380/440V | kW | 5.5 |
| | 500/690V | kW | 5.5 |
| Single-phase AC-3 | 110V | kW | 0.8 |
| | 220/230V | kW | 2.2 |
| | 380/440V | kW | 3 |
| Three-phase AC23A | 220/230V | kW | 5 |
| | 380/440V | kW | 7.5 |
| | 500/690V | kW | 7.5 |
| Single-phase AC23A | | | |

| | | | |
|--|----------|-----------------|--------------------------|
| | 110V | kW | 0.8 |
| | 220/230V | kW | 2.5 |
| | 380/440V | kW | 3.7 |
| <hr/> | | | |
| Rated operational current in DC | | | |
| DC21A | | | |
| | 48V | A | 20 |
| | 60V | A | 20 |
| | 110V | A | 4 |
| | 220V | A | 0.6 |
| | 440V | A | 0.25 |
| <hr/> | | | |
| DC23A (poles in series) | | | |
| | 24V | A | 20 (1) |
| | 48V | A | 20 (2) |
| | 60V | A | 20 (3) |
| | 110V | A | 10 (3) |
| | 220V | A | 8 (4) |
| <hr/> | | | |
| DC13 | | | |
| | 24V | A | 20 |
| | 48V | A | 16 |
| | 60V | A | 12 |
| | 110V | A | 1 |
| | 220V | A | 0.4 |
| | 440V | A | 0.15 |
| <hr/> | | | |
| Power dissipation | | W | 0.8 |
| <hr/> | | | |
| Mechanical features | | | |
| Terminals screw | | | M3 |
| Tightening torque for terminals max | | | Nm 0.5 |
| <hr/> | | | |
| Conductor size | | | |
| AWG - Rigid cable | | | |
| | min | AWG | 20 |
| | Max | AWG | 12 |
| <hr/> | | | |
| AWG - Flexible cable | | | |
| | min | AWG | 20 |
| | Max | AWG | 14 |
| <hr/> | | | |
| Conductor size (IEC) - Flexible cable | | | |
| | min | mm ² | 0.5 |
| | Max | mm ² | 2.5 |
| <hr/> | | | |
| Conductor size (IEC) - Rigid cable | | | |
| | min | mm ² | 0.5 |
| | Max | mm ² | 2.5 |
| <hr/> | | | |
| Mechanical life | | | cycles 5x10 ⁶ |
| <hr/> | | | |
| UL technical data | | | |
| Motor power for direct-on-line control | | | |
| for three-phase motor | | | |
| | 120V | HP | 1.5 |
| | 240V | HP | 3 |
| | 480V | HP | 7.5 |
| | 600V | HP | 10 |
| <hr/> | | | |
| for single-phase motor | | | |
| | 120V | HP | 0.75 |
| | 240V | HP | 2 |

Ambient conditions

Temperature

Operating temperature

min °C -25
max °C +55

Storage temperature

min °C -40
max °C +70

Resistance & Protection


| | |
|---------------------|------|
| Frontal IP degree | IP65 |
| Terminals IP degree | IP00 |

Dimensions

| Series | Enclosure size | Number of elements | | Dimensions | | | | | | | | | | Cable entry | Protection degree |
|----------|----------------|--------------------|-----|------------|-----|---------|---------|-----|----|----|------|------|-------|------------------|-------------------|
| | | L | L1 | A | A1 | C | C1 | D | F | M | N | L | L1 | | |
| 7GN12⓪ | 75x75⓪ | 1-2 | 3-4 | 75 | 75 | 50 | 64 | 4.5 | 19 | 14 | 28 | 57.5 | 79.8 | 4xPG13.5 | IP65 |
| 7GN20⓪ | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN25⓪ | | 1 | 2-3 | | | | | | | | | | | | |
| 7GN12⓪ | 90x90 | 1-3 | 4-6 | 90 | 90 | 79 | 63 | 4.5 | 25 | 19 | 30 | 71.3 | 98.3 | 4xPG16 | IP65 |
| 7GN20⓪ | | 1-3 | 4-6 | | | | | | | | | | | | |
| 7GN25⓪ | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN32 | | 1 | 2-3 | | | | | | | | | | | | |
| 7GN40 | | 1 | 2-3 | | | | | | | | | | | | |
| 7GN12 | 110x110 | 1-4 | 5-8 | 110 | 110 | 98.4 | 83 | 4.5 | 32 | 21 | 39.5 | 85.5 | 119.5 | 4xPG21 | IP65 |
| 7GN20 | | 1-4 | 5-8 | | | | | | | | | | | | |
| 7GN25 | | 1-3 | 4-5 | | | | | | | | | | | | |
| 7GN32⓪ | | 1-2 | 3-5 | | | | | | | | | | | | |
| 7GN40⓪ | | 1-2 | 3-5 | | | | | | | | | | | | |
| 7GN63 | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN32⓪ | 125x175 | 1-2 | 3-4 | 125 | 175 | 146 | 112 | 5.5 | 32 | 21 | 68 | 84.3 | 118.3 | 4xPG21 2xPG11 | IP65 |
| 7GN40⓪ | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN63⓪ | | 1-2 | 3-4 | | | | | | | | | | | | |
| 7GN125 | | 1 | 2 | | | | | | | | | | | | |
| 7GN32 | 198x248 | - | 1-7 | 198 | 248 | 190-210 | 140-180 | 5.5 | 32 | 35 | 104 | - | 166.5 | 6xPG16- 21-29 | IP65 |
| 7GN40 | | - | 1-7 | | | | | | | | | | | | |
| 7GN63⓪ | | - | 1-6 | | | | | | | | | | | | |
| 7GN125⓪⓪ | | - | 1-4 | | | | | | | | | | | | |

- ⓪ Standard dimensions for cam switch in plastic enclosure with black handle (P).
- ⓪⓪ Standard dimensions for cam switch in plastic enclosure with red/yellow handle padlockable in 0 (P25).

Wiring diagrams

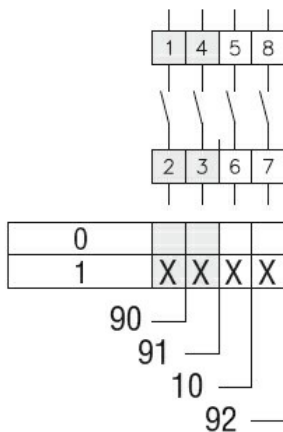

Certifications and compliance

Compliance

IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001105 - Off-load switch

