



Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
IEC Conventional free air thermal current $I_{th} \leq 40^\circ C$	A	10
Tightening torque for terminals	min	Nm 0.8
	max	Nm 1
	min	lbin 7
	max	lbin 9
Max number of wires simultaneously connectable	Nr.	2
Conductor section	AWG/Kcmil	
	max	14
	Flexible w/o lug conductor section	
	min	mm ² 0.75
	max	mm ² 2.5
	Flexible c/w lug conductor section	
	min	mm ² 0.75
	max	mm ² 2.5
Flexible with insulated spade lug conductor section		
min	mm ² 0.75	
max	mm ² 2.5	

Mechanical features

Operating position	normal allowable	On vertical plane
		Any
Fixing		Front centre mounting
Weight	g	48
Terminals screw		Screw

Auxiliary contact characteristics

Type of contact		1N0+1NC+1NOEM+
Thermal current I_{th}	A	10
IEC/EN 60947-5-1 designation		A600 - Q600
Operating current AC15	230V	A 3
	400V	A 1.9
	500V	A 1.4
Operating current DC13	24V	A 3
	48V	A 1.5
	60V	A 1.2
	110V	A 0.6
	125V	A 0.55
	220V	A 0.27
	600V	A 0.1

Electrical characteristics

Conductivity	5V 10 mA
--------------	----------

UL/CSA and IEC/EN 60947-5-1 designation	A600 Q600		
Operating current AC15	120V	A	6
	240V	A	3
	480V	A	1.5
	600V	A	1.2

Operating current DC13	12V	A	10
	250V	A	0.27
	440V	A	0.15
	500V	A	0.13

UL technical data


Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Ambient conditions


Temperature	Operating temperature	min	°C	-50
		max	°C	+70
	Storage temperature	min	°C	-60
		max	°C	+80

Max altitude	m	3000
--------------	---	------

Dimensions

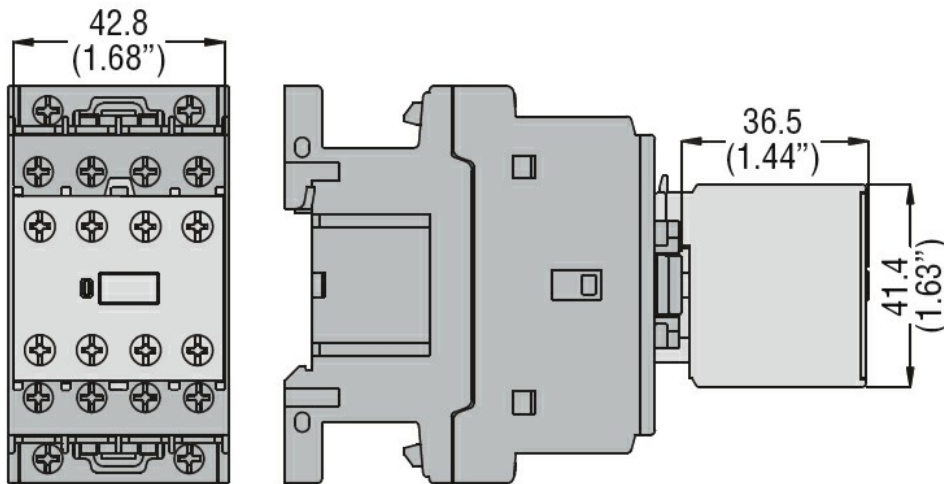

Wiring diagrams

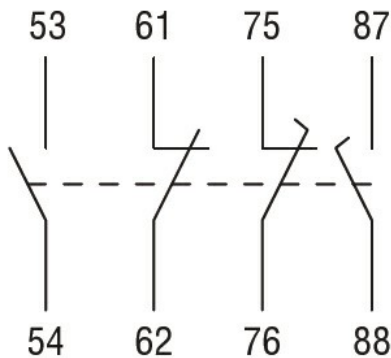

Certifications and compliance

Compliance	CSA C22.2 n° 60947-1
	CSA C22.2 n° 60947-5-1
	IEC/EN 60335-2-89

AUXILIARY CONTACT WITH FRONT CENTRE MOUNTING. SCREW TERMINALS, FOR BF00, BF09...BF150 SERIES CONTACTORS, 1NO+1NC WITH MIRROR AND MECHANICALLY LINKED CONTACT FUNCTION AND 1EM+1LB (1 EARLY MAKE+1 LATE BREAK)

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block