



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	800
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	12
Operating current I_e		
AC21A	400V	A 800
	500V	A 800
	690V	A 800
AC22A	400V	A 800
	500V	A 800
	690V	A 800
AC23A	400V	A 800
	500V	A 800
	690V	A 800
Power dissipation per pole max	W	40
Rated operational power AC23A	400V	kW 560
	690V	kW 800
Reactive power for control of capacitors at		
Making capacity AC23A 400V	A	8000
Breaking capacity AC23A 400V	A	6400
Mechanical life	cycles	5000

Mechanical features

Operating position	normal allowable	Vertical plan Any
Terminals	type	M12 x 40
Tightening torque for terminals	min	Nm 50
	max	Nm 75
	min	lbin 442
	max	lbin 664
Conductor section	IEC min	mm ² 2x185
	AWG/kcmil min	2
	AWG/kcmil max	kcmil 4x600

UL technical data


UL Terminal kit lugs	GL506-GL507
----------------------	-------------

Ambient conditions

Operating temperature	min	°C	-25
-----------------------	-----	----	-----

Storage temperature	max	°C	+55
	min	°C	-40
Max altitude	max	°C	+70
		m	3000

Dimensions

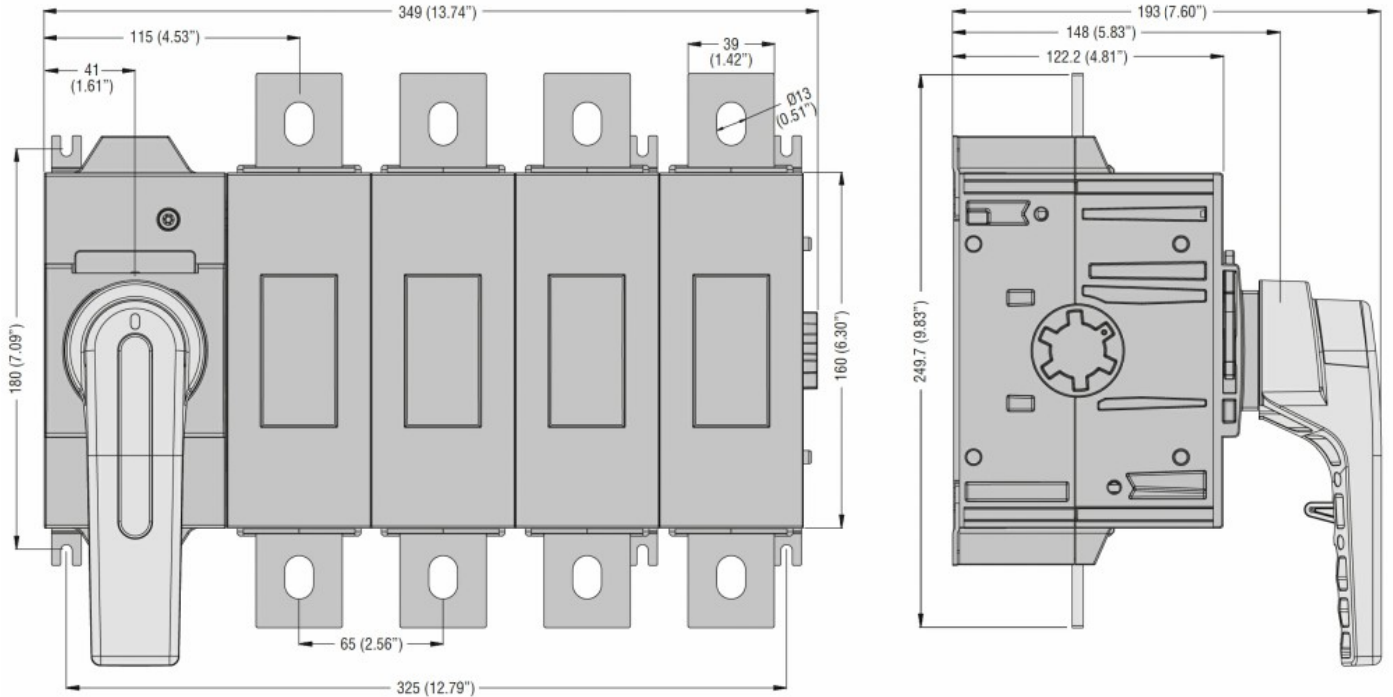

Wiring diagrams



Certifications and compliance

Compliance	IEC/EN 60947-1
	IEC/EN 60947-3

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology