



### Electrical features

Relay adj range	A	35-50
IEC technical characteristics ( $\leq 440V$ )		
	le	A
	kW	kW
		50
		18.5...22

### Components

Starter enclosure standard supplied	M3PA
Contactor standard supplied	BF5000A
Thermal relay standard supplied	RF825000

### UL technical data

Maximum UL/CSA horsepower ratings single-phase			
	110V-120V	HP	5
	220V-240V	HP	10
Maximum UL/CSA horsepower ratings three-phase, 3-pole			
	200V-208V	HP	15
	220V-240V	HP	20
	440V-480V	HP	40
	550V-600V	HP	40

### Mechanical features

Weight	g	3760
--------	---	------

### Ambient conditions

Operating temperature			
	min	°C	-25
	max	°C	+60


### Storage temperature

	min	°C	-40
	max	°C	+70


### Resistance & Protection

Frontal IP degree	IP65
-------------------	------

### Dimensions

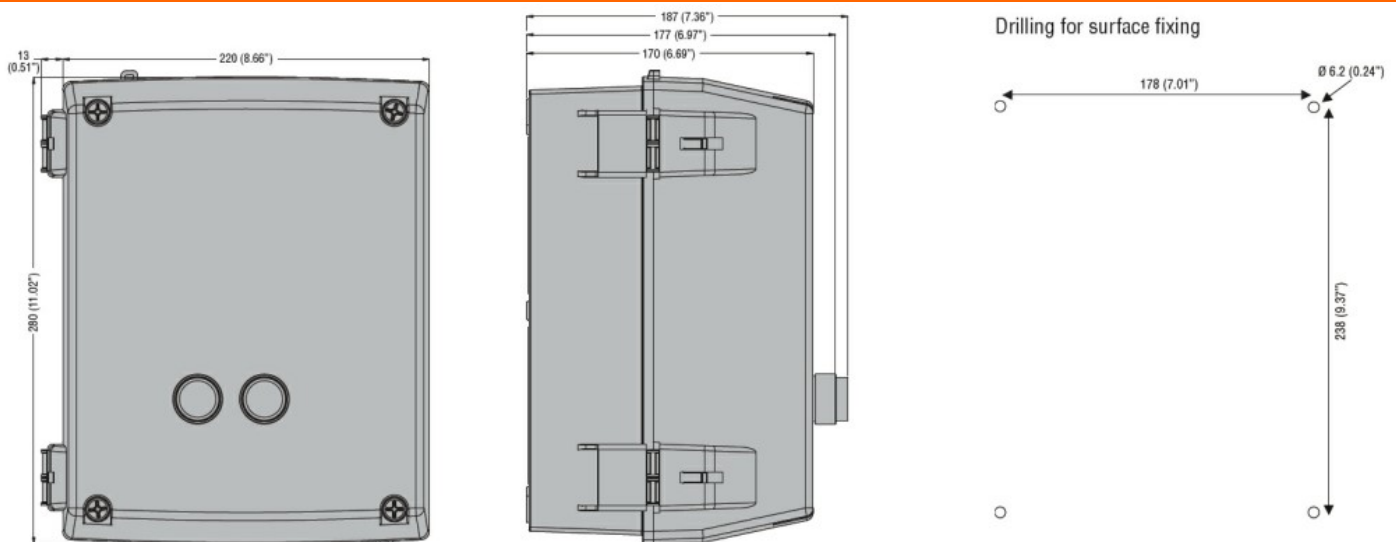

Wiring diagrams

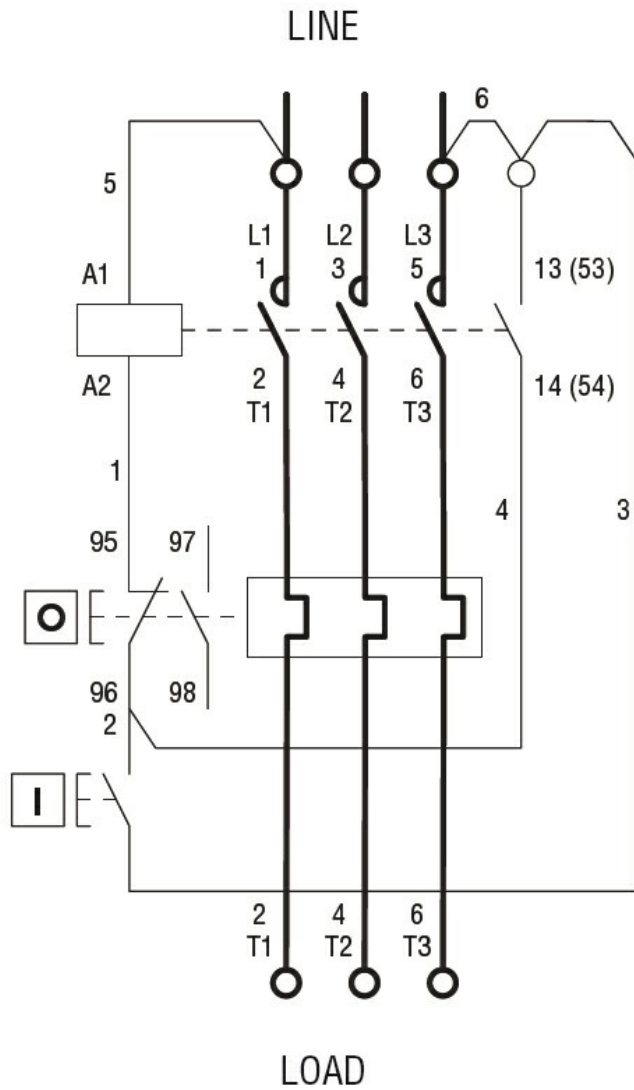

I = Start; O = Stop/Reset

Certifications and compliance

Certificates

EAC

ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination