

Electrical features

Relay adj range	A	60-82
IEC technical characteristics ($\leq 440V$)		
	le	A 80
	kW	kW 37...45

Components

Starter enclosure standard supplied	M3PA
Contactor standard supplied	BF8000A
Thermal relay standard supplied	RF828200

UL technical data

Maximum UL/CSA horsepower ratings three-phase, 3-pole			
	200V-208V	HP	25
	220V-240V	HP	30
	440V-480V	HP	60
	550V-600V	HP	75

Mechanical features

Weight	g	3760
--------	---	------


Ambient conditions

Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70


Resistance & Protection

Frontal IP degree	IP65
-------------------	------

Dimensions

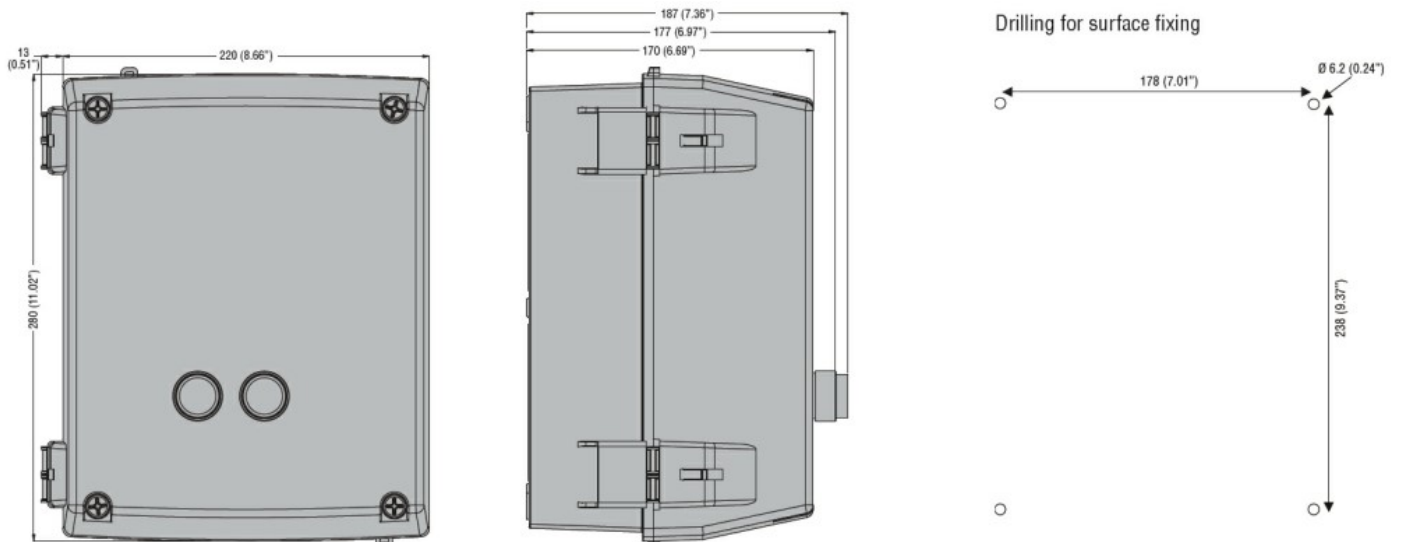

Wiring diagrams

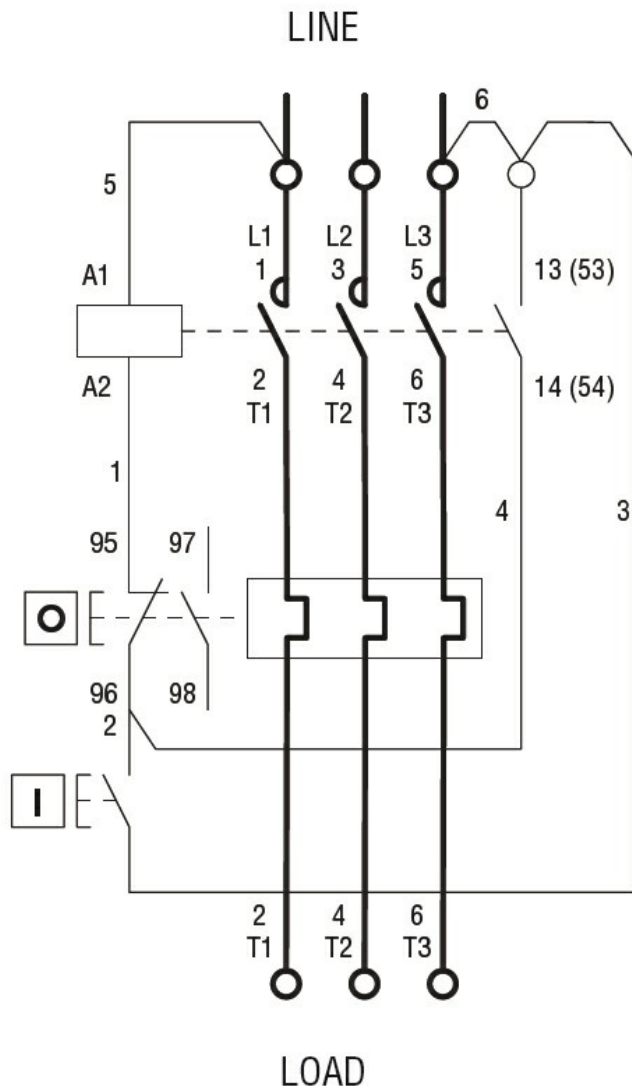

I = Start; O = Stop/Reset

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination