



### Auxiliary contact characteristics

Type of contact	2NO		
Rated insulation voltage $U_i$ IEC/EN	V	690	
Rated impulse withstand voltage $U_{imp}$	kV	4	
UL/CSA and IEC/EN 60947-5-1 designation	C600 - Q600		
Min. conductivity	5V 10mA		
Operating current AC15			
	24V	A	2.5
	48V	A	2.5
	60V	A	2.5
	110V	A	1.5
	230V	A	1.5
	400V	A	0.95
	500V	A	0.35
	690V	A	0.3
Operating current DC13			
	24V	A	2.5
	48V	A	2.5
	60V	A	2.5
	110V	A	0.55
	125V	A	0.55
	220V	A	0.27
	600V	A	0.1

### Operational characteristics


Rated supply voltage AC	VAC	110
Rated frequency	Hz	50
In-rush consumption	VA	12
Holding consumption	VA	3.5
Release voltage	Us	35...70
Operating voltage	US	85...110

### Mechanical features


Tightening torque for terminals			
	min	Nm	1
	max	Nm	1
	min	lbin	9
	max	lbin	9
Conductor section			
AWG/Kcmil			
	min		18
	max		14
Flexible w/o lug conductor section			
	min	mm <sup>2</sup>	0.75
	max	mm <sup>2</sup>	2.5
Flexible c/w lug conductor section			
	min	mm <sup>2</sup>	0.75

	max	mm <sup>2</sup>	2.5
Operating position	normal allowable	Vertical Any	
Terminals	type screw width tool	mm	Screw M3.5 7.2 Ph2
Weight		g	130
<b>Operations</b>			
Mechanical life		cycles	100000
<b>Ambient conditions</b>			
Temperature	Operating temperature	min max	°C °C -20 +60
	Storage temperature	min max	°C °C -50 +80
Max altitude		m	3000
IEC degree of protection			IP20

**Dimensions**

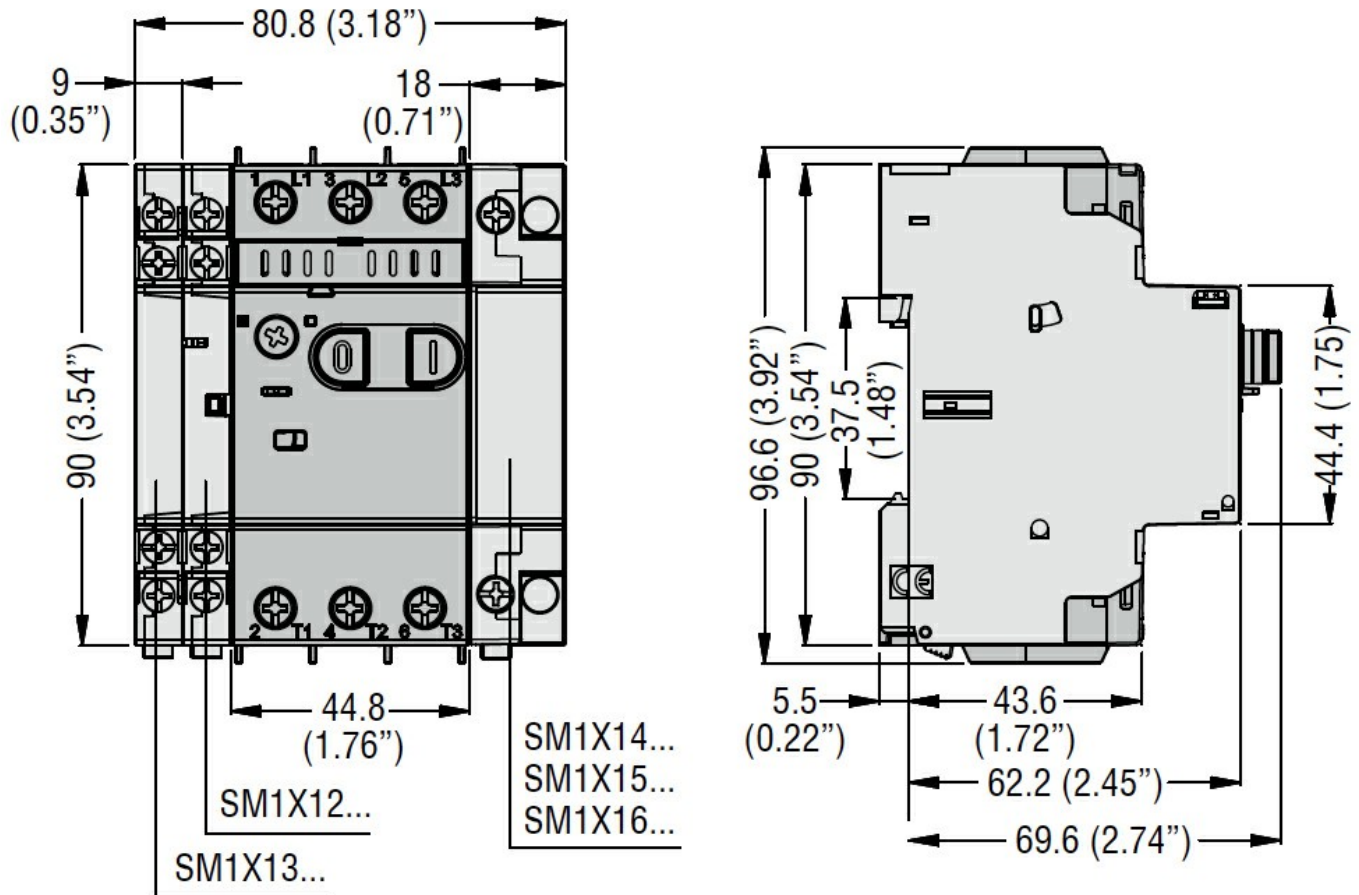

**Wiring diagrams**

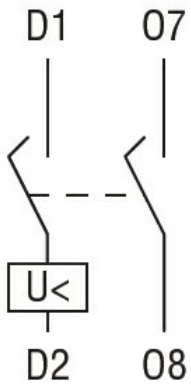

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

#### Certificates

cULus

EAC

### ETIM classification